REV.	REMARK	DATE	SIGN.

RoHS

MATERIAL RoHS COMPLIANT:
CONNECTOR:
P0:4X PLUG WITH THUMBSCREWS.
(1)HOUSING– ZINC DIE CAST
(2)CONTACTS– 30u" INCHES GOLD PLATING
P1~P4 29PIN INTERNAL CONNECTOR
P5~P8 4PIN POWER MALE CONNECTOR
POWER CABLE: UL 1007 22AWG 80°C 300V

CABLE:
CONDUCTOR: 26AWG, SOLID SILVER, PLATED CU ON PAIR #1 & #2.
INSULATION: CELLULAR POLYOLEFIN.
SHIELD: FOUR 28AWG SOLID DRAIN WIRES ON PAIR #1 & #2, AND WRAPPED WITH ALUMINUM POLYESTER TAPE.
OVER JACKET: PVC SEMI-TRANSPARENT, COLOR IN RED, OD: 1.93mm X 7.3mm, HITACHI

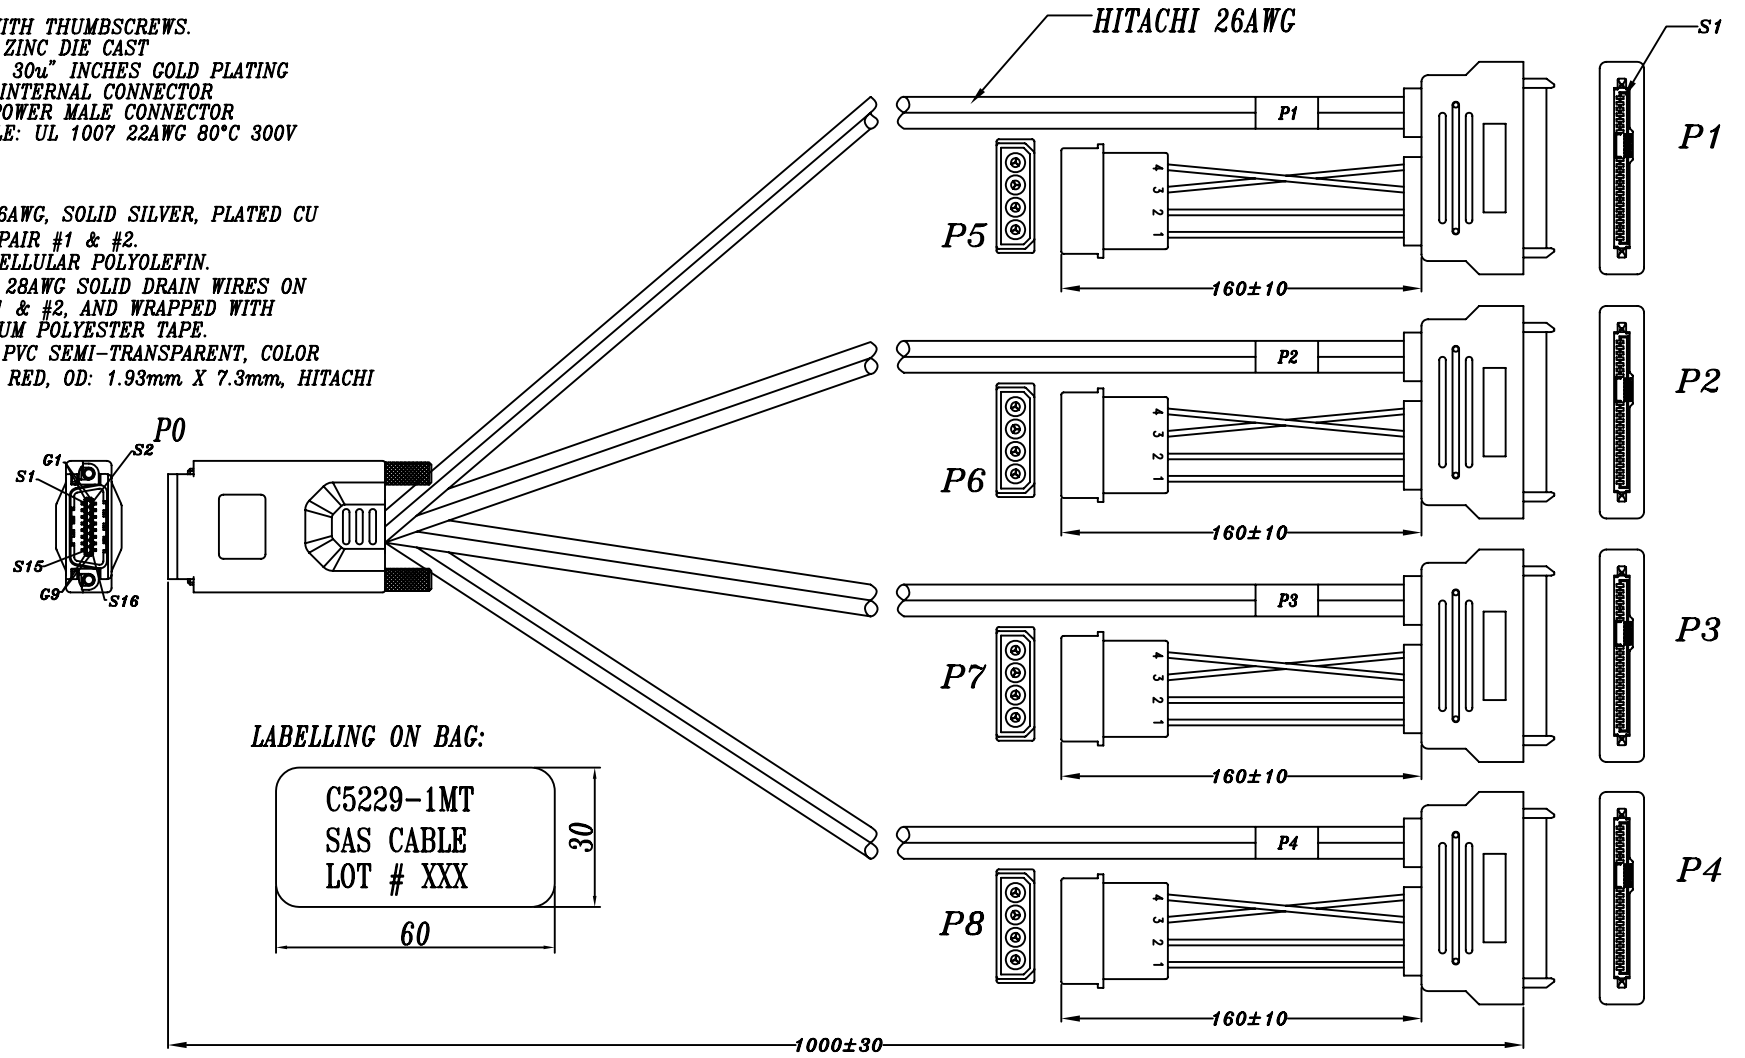

LABELLING ON BAG:

C5229-1MT
SAS CABLE
LOT # XXX

30
60

DataStorageCables.com	DESC.	SAS4x PLUG TO SAS DRIVE REC.*4 CABLE ASSEMBLY		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm		
	P/N	C5229-1MT	CUSTOMER P/N			SHIU		DATE	02/04/'08	DWG NO:	DWG\B\1801		