




1	2	3	4	5	6
REV.	REMARK	DATE	SIGN.		

WIRING DIAGRAM			
SAS 4x(HOST)		MINI SAS 4!(TARGET)	
REC.	PIN	SIGNAL	REC. PIN
P2	S16	TX0+	A2
	S15	TX0-	A3
	S14	TX1+	A5
	S13	TX1-	A6
	S12	TX2+	A13
	S11	TX2-	A14
	S10	TX3+	A16
	S9	TX3-	A17
	S1	RX0+	B2
	S2	RX0-	B3
	S3	RX1+	B5
	S4	RX1-	B6
	S5	RX2+	B13
	S6	RX2-	B14
	S7	RX3+	B16
	S8	RX3-	B17
	GND GROUND		GND GROUND
	G1-G9		A1,4,7,12,15,18 B1,4,7,12,15,18

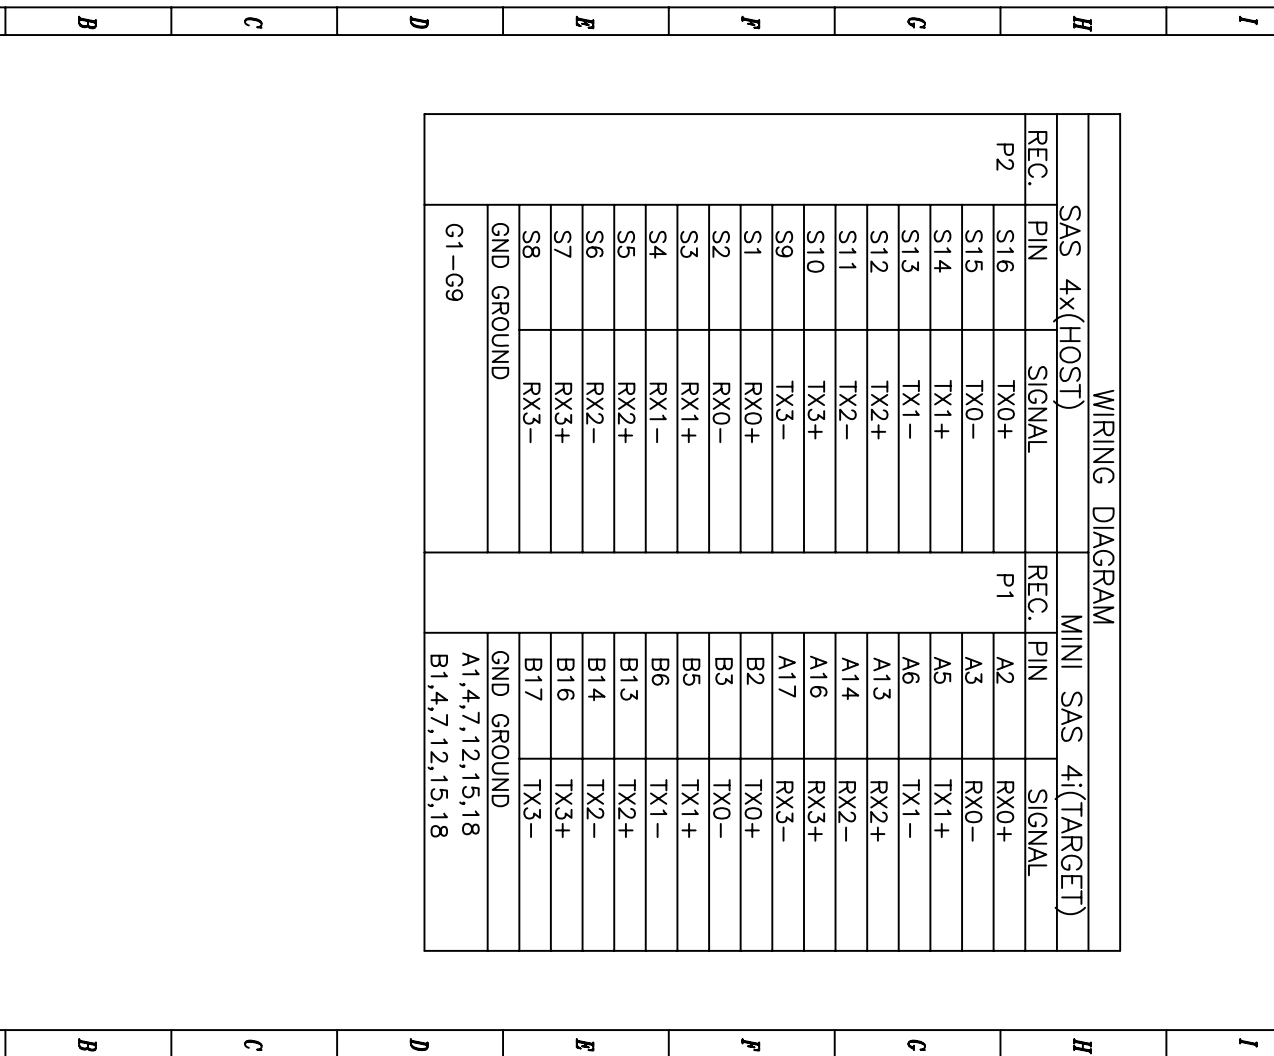

DESC.		SAS 4X TO MINI-SAS 36PIN CABLE			
P/N	C5236-SMT	CUSTOMER P/N			
APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1
		KU		DATE	01/05/07
				DWG NO.	DWG\A\1323
				UNIT	mm

DataStorageCables.com