




REV.	1	REMARK	2	DATE	3	SIGN.	4	5	6	7	8	9
------	---	--------	---	------	---	-------	---	---	---	---	---	---

ROHS

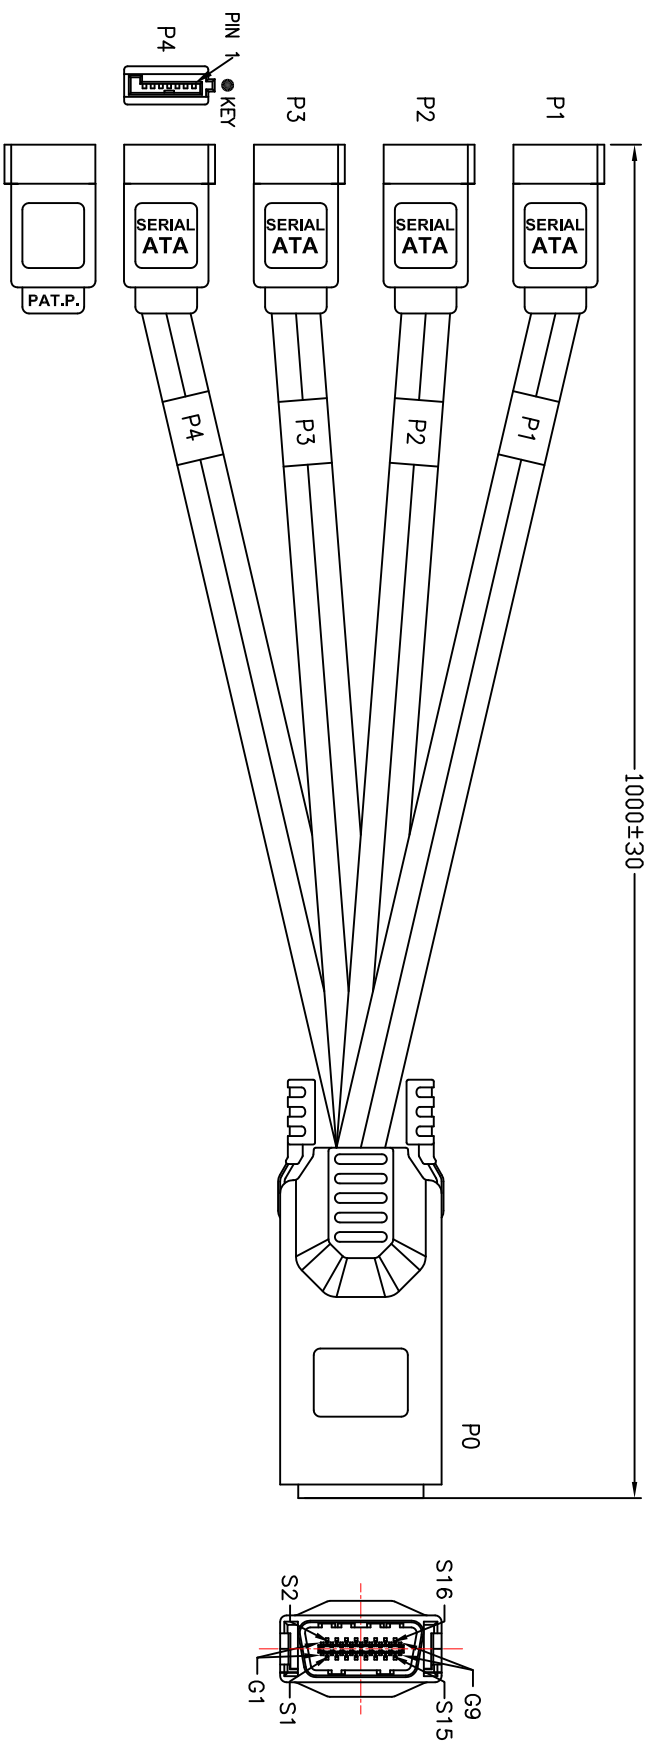

MATERIAL ROHS COMPLIANT:

- 1.CABLE:
 CONDUCTOR: 26AWG, SOLID SILVER, PLATED CU ON PAIR #1 & #2.
 INSULATION: CELLULAR POLYOLEFIN.
 SHIELD: FOUR 28AWG SOLID DRAIN WIRES ON PAIR #1 & #2,
 AND WRAPPED WITH ALUMINUM POLYESTER TAPE.
 OVER JACKET: PVC SEMI-TRANSPARENT, COLOR IN RED,
 OD: 1.93mm X 7.3mm HITACHI
- 2.CONNECTOR:
 P0: SAS 4X LATCH TYPE (SFF-8470)
 (1) BACKSHELL: ZINC DIE CAST/ NICKEL PLATING
 (2) CONTACTS: 30u" INCHES GOLD PLATING
 P1-P4: SATA 7P INTERNAL CABLE REC.

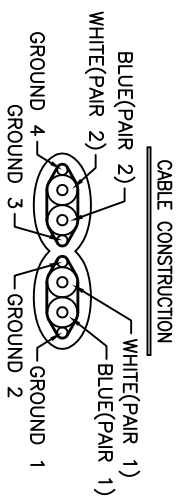

DataStorageCables.com

1	2	3	4	5	6	7	8	9	
DESC.	SATA 7P REC. TO SAS 4X LATCH TYPE CABLE ASS'Y	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm
P/N	C5247-1ML-X	CUSTOMER P/N		Sino		DATE	05/07/12	DWG NO:	DWG\B\3973

