



1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

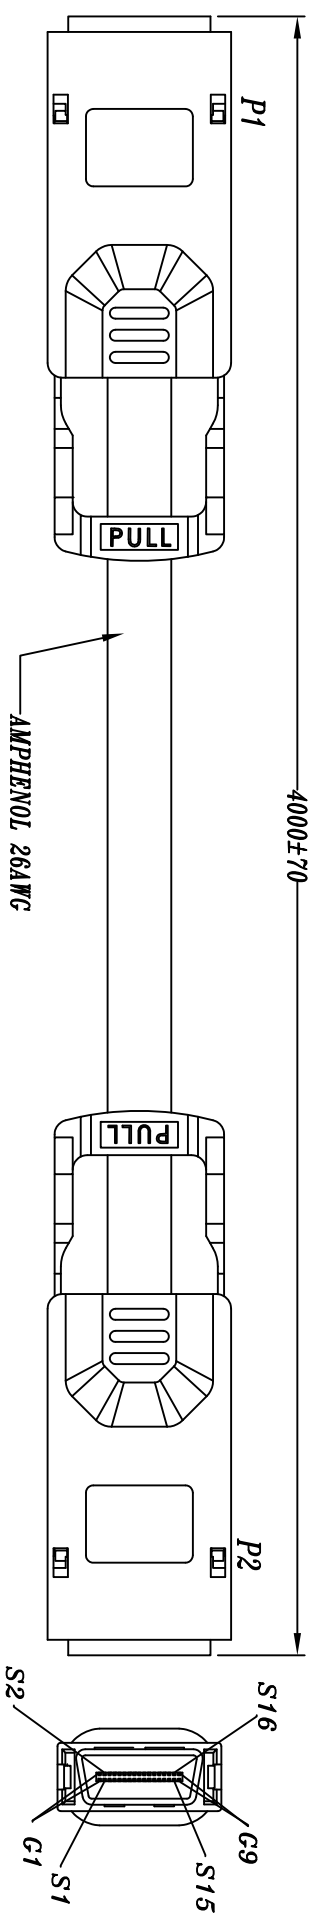

1. PAIR COMPONENT:
 CONDUCTOR: 26AWG SOLID SILVER PLATED.
 DRAIN WIRE: 27AWG SOLID TINNED COPPER.
 PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 20% OVERLAP
 2. FINAL ASSEMBLY:
 CORE: 8 PAIRS NUMBERED 1 THRU 8.
 INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE FACING OUT, 20% OVERLAP.
 OUTER SHIELD: 36WG TIN PLATED COPPER BRAID, 85% COVERAGE.
 DIAMETER: 9.78MM NOMINAL, COLOR: BLACK
 DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
 MUTUAL CAPACITANCE: 42PF/M NOMINAL.
 TIME DELAY: 4.25NS/M.

2. CONNECTOR & HOOD:
 P1 & P2 :INFINIBAND 4X PLUG - EJECTOR TYPE
 (1)HOUSING- ZINC DIE CAST
 (2)CONTACTS- 30u" INCHES GOLD PLATING
 WITH EQ
 3. FOR DDR USE, TESTING CONDITION - 5G

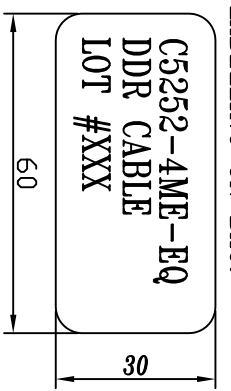

LABELLING ON BAG:

WIRING DIAGRAM		
P1	SIGNAL	P2
PIN NO.	SIGNAL	PIN NO.
G1 - G9	GROUND	G1 - G9
S1	RX0+	S16
S2	RX0-	S15
S3	RX1+	S14
S4	RX1-	S13
S5	RX2+	S12
S6	RX2-	S11
S7	RX3+	S10
S8	RX3-	S9
S9	TX3-	S8
S10	TX3+	S7
S11	TX2-	S6
S12	TX2+	S5
S13	TX1-	S4
S14	TX1+	S3
S15	TX0-	S2
S16	TX0+	S1
CONNECTOR SHELL		CONNECTOR SHELL

DataStorageCables.com

1	2	3	4	5	6	7	8	9
DESC.	4X/4X CABLE EJECTOR TYPE	APPROVED	CHECKED	DESIGNED				
P/N	C5252-4ME-EQ			Ku.				
TOLERANCE	SCALE	1 = 1	UNIT	mm				
DATE	10/21/05	DWG NO.	DWG	B\1823				