



1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

ROHS

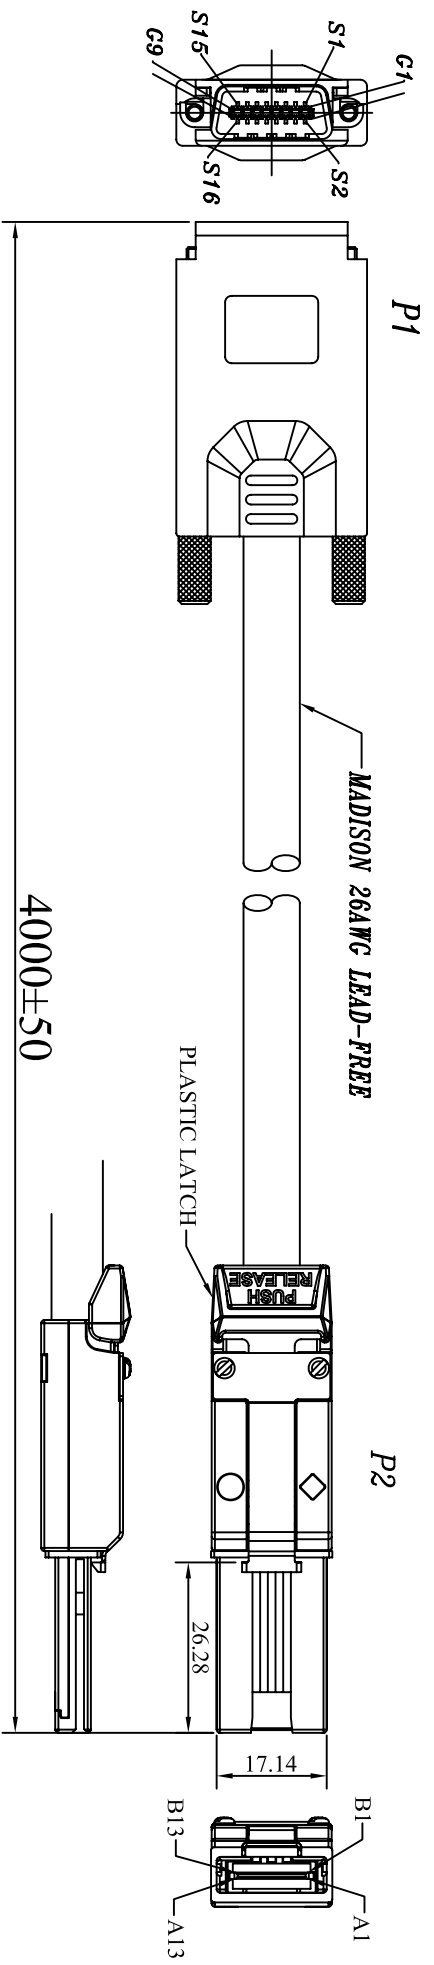

LABELLING ON BAG:

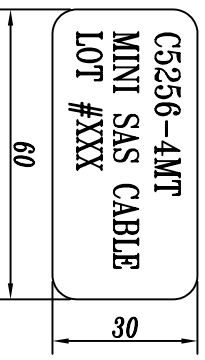

MATERIAL ROHS COMPLIANT:

CABLE:
CONDUCTOR: 8 TWISTED PAIRS, 26AWG SOLID SILVER PLATED COPPER.
INSULATION: FOAM POLYOLEFIN.
PAIR: 2 SINGLES LAID FLAT AND PARALLEL.
PAIR DRAIN WIRE: 28AWG SOLID SILVER PLATED COPPER.
PAIR SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE PACING IN, 25% OVERLAP.
INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE PACING OUT, 25% OVERLAP.
OUTER SHIELD: 38AWG TIN PLATED COPPER BRAID, 85% COVERAGE.
DIAMETER: 8.763mm NOMINAL. COLOR: BLACK.
PRINT LEGEND: "MADISON CABLE CORP. TYPE CL2 75°C 26AWG (UL) TurboTwin™ LEAD-FREE"
DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE. TARBO TWIN™


CONNECTOR:

P1: SAS 4X CONNECTOR PLUG THUMBSCREWS TYPE CONNECTOR:
 (1) BACKSHELL- ZINC DIE CAST/ NICKEL PLATING
 (2) CONTACTS- 30u" INCHES GOLD PLATING
P2: Mini SAS 4X CABLE PLUG - 26CKT CONNECTOR
 (1) P.C.B: FR4, 4 LAYERS
 (2) LATCH: STAINLESS STEEL
 (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING
 (4) WITH EXTERNAL UNIVERSAL KEY

DataStorageCables.com

DESC.	Mini SAS 4x to SAS 4x cable assembly	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm
P/N	C5256-4MT	CUSTOMER P/N		KU		DATE	03/03/07	DWG NO.	DWG/RC/2305

1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

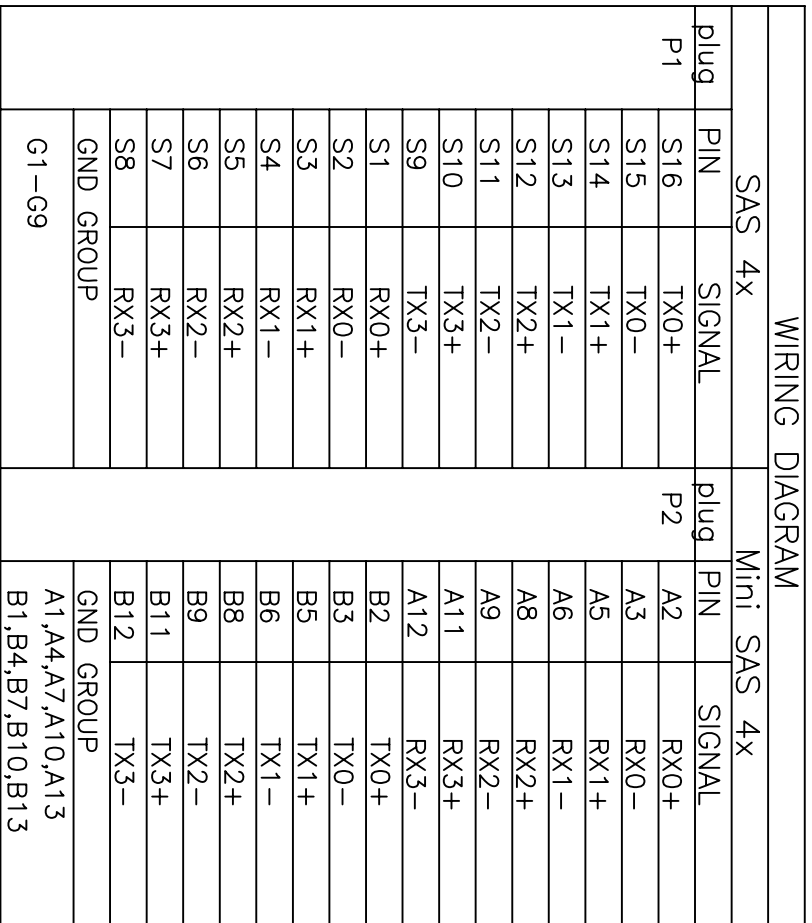

DataStorageCables.com	DESC.	Mini SAS 4x to SAS 4x cable assembly			APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	
	P/N	C5256-4MT	CUSTOMER P/N				KU		DATE	09/03/07	DMG NO.	DMG/RC/2305	

1 2 3 4 5 6 7 8 9