



1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

RoHS

LABELLING ON BAG:



3000±50

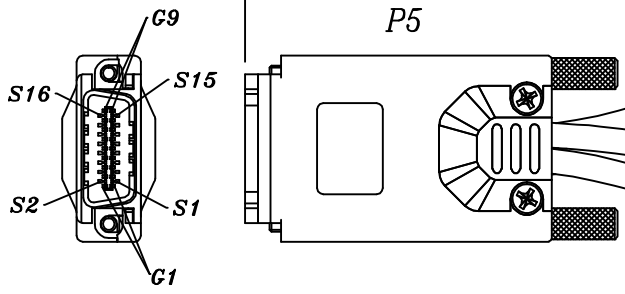

MADSION RoHS 28AWG CABLE
P/N:04KD2LF003


MATERIAL RoHS COMPLIANT:
CABLE:

CONDUCTOR: TWO SINGLES LAID FLAT AND PARALLEL,
28AWG SOLID SILVER PLATED COPPER.
INSULATION: FOAM POLYOLEFIN.
DIAMETER: 5.59mm NOMINAL. COLOR: BLACK.
DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR

CONNECTOR:

- P1~P4: Mini SAS 4X CABLE PLUG - 26CKT CONNECTOR (SFF-8088)
 - (1) P.C.B: FR4, 4 LAYERS, WITH EQ
 - (2) LATCH: STAINLESS STEEL
 - (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING
 - (4) WITH EXTERNAL UNIVERSAL KEY
- P5: SAS 4X CABLE PLUG THUMBSCREWS TYPE CONNECTOR: (SFF-8470)
 - (1) P.C.B: FR4, 4 LAYERS, WITH EQ
 - (2) BACKSHELL- ZINC DIE CAST/ NICKEL PLATING
 - (3) CONTACTS- 30u" INCHES GOLD PLATING

PLASTIC LATCH



DataStorageCables.com

DESC.	Mini SAS 4X (x4) to SAS 4X Cable Assembly		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	
P/N	C5256X4-3MT	CUSTOMER P/N	C5256X4-3MT		SHIU		DATE	03/12/08	DWG NO:	DWG/RC/2770	

1 2 3 4 5 6 7 8 9

	1	2	3	4	5	6	7	8	9		
	REV.	REMARK	DATE	SIGN.							
F											
E	WIRING DIAGRAM										
	SAS 4x			Mini SAS 4x							
	plug	PIN	SIGNAL	plug	PIN	SIGNAL					
	P5	S1	RX0+	P1	B2	TX0+					
		S2	RX0-		B3	TX0-					
		S15	TX0-		A3	RX0-					
		S16	TX0+		A2	RX0+					
		S3	RX1+	P2	B2	TX0+					
		S4	RX1-		B3	TX0-					
		S13	TX1-		A3	RX0-					
		S14	TX1+		A2	RX0+					
		S5	RX2+	P3	B2	TX0+					
		S6	RX2-		B3	TX0-					
	S11	TX2-	A3		RX0-						
	S12	TX2+	A2		RX0+						
	S7	RX3+	P4	B2	TX0+						
	S8	RX3-		B3	TX0-						
	S9	TX3-		A3	RX0-						
	S10	TX3+		A2	RX0+						
	GND GROUP			GND GROUP(P1,P2,P3,P4)							
	G1-G9			A1,A4,A7,A10,A13 B1,B4,B7,B10,B13							
	SHELL			SHELL (P1,P2,P3,P4)							
A	DataStorageCables.com		DESC.	Mini SAS 4X (x4) to SAS 4X Cable Assembly	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE 1 = 1	UNIT mm	
			P/N	C5256X4-3MT	CUSTOMER P/N	C5256X4-3MT			DATE 03/12/08	DWG NO:	DWG/RC/2770
	1	2	3	4	5	6	7	8	9		