


1	2	3
REV.	REMARK	SIGN.
		DATE

WIRING DIAGRAM

HIGH SPEED SIGNAL			
P1(Mini SAS HD 4i Plug)		P2(Mini SAS HD 4x Plug)	
PIN	SIGNAL	PAD	SIGNAL
A4	RX1+	C4	TX1+
A5	RX1-	C5	TX1-
A7	RX3+	C7	TX3+
A8	RX3-	C8	TX3-
B4	RX0+	D4	TX0+
B5	RX0-	D5	TX0-
B7	RX2+	D7	TX2+
B8	RX2-	D8	TX2-
C4	TX1+	A4	RX1+
C5	TX1-	A5	RX1-
C7	TX3+	A7	RX3+
C8	TX3-	A8	RX3-
D4	TX0+	B4	RX0+
D5	TX0-	B5	RX0-
D7	TX2+	B7	RX2+
D8	TX2-	B8	RX2-
GND GROUP:		GND GROUP	
A3,A6,A9,B3,B6,B9, C3,C6,C9,D3,D6,D9.		A3,A6,A9,B3,B6,B9, C3,C6,C9,D3,D6,D9.	

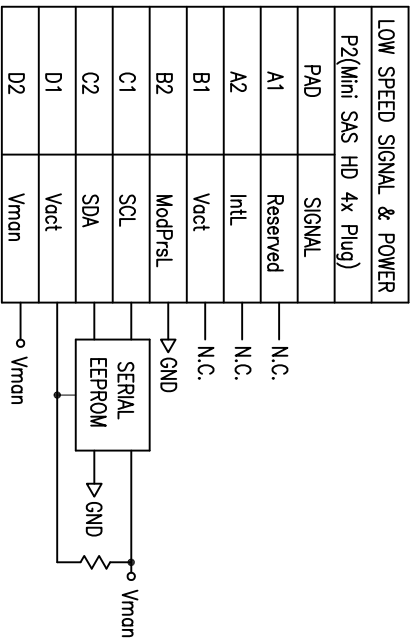

DataStorageCables.com

1	2	3	4	5	6	7	8	9	
DESC.		Mini SAS HD 4i/Mini SAS HD 4x CABLE ASS'y	CUSTOMER P/N		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE
P/N							Sino	*	*
								DATE	UNIT
								04/07/14	mm
									DWG NO: DWG\RC\6689