



REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A0	Initial Release for Manufacture	Nov.30.09	Jerry

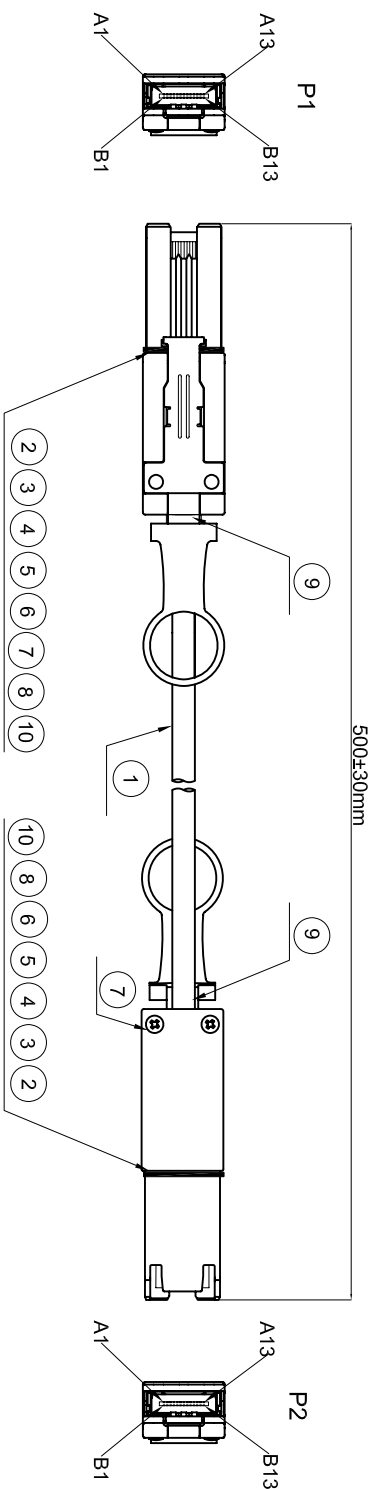

- ELECTRICAL TEST:**
- 1.OPEN / SHORT 100% TEST.
 - 2.CONTACT RESISTANCE : 1Ω(MAX).
 - 3.INSULATION RESISTANCE : 20MΩ (MIN).
 - 4.HI-POT : DC 300V /10MS.

10	4-15-0001-200201	TUBE OD:0.6mm BK	3*16	mm
9	4-20-0063-001001	ACETATE TAPE W=10mm BK	120*2	mm
8	4-20-0002-051051	FOILCU W=5mm	60*2	mm
7	4-13-0032-M26551	SCREW M2*0.65 NICKEL PLATED	4	PCS
6	4-12-0016-000051	EXT.MINI SAS 26P CONDUCTIVE FOAM	2	PCS
5	3-02-0002-086701	TRL-THERMELT-867	10	G
4	2-70-0005-011551	MINI SAS 26P ZINE ALLOY BOTTOM SHELL NICKEL PLATED/SPRING	2	PCS
3	2-70-0002-011551	MINI SAS 26P ZINE ALLOY UP SHELL NICKEL PLATED/SPRING	2	PCS
2	2-70-0004-011551	EXT.MINI SAS 26P PCB	2	PCS
1	1-67-0001-200201	[[28#*2P+Filler+Binder]*6P*28#]+Binder+AL.ML+Braid+Jacket	460	mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT

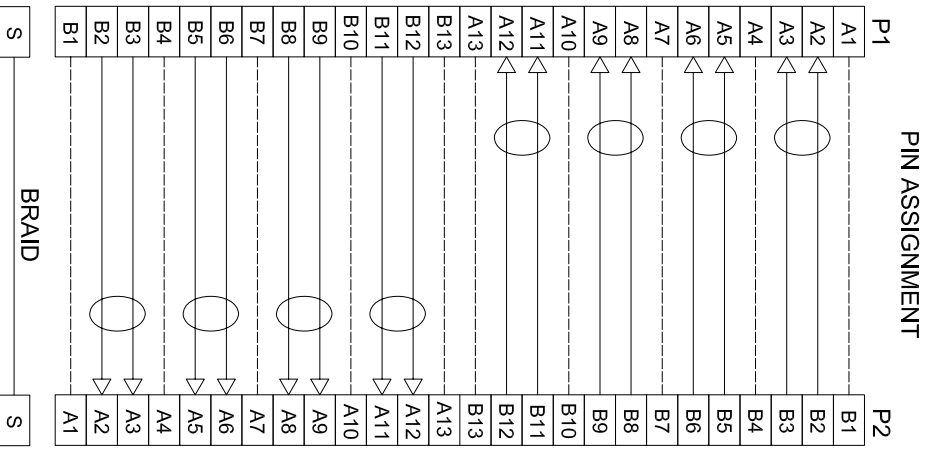

WY139		<small>DIMENSION ARE MILLIMETERS TOLERANCES ARE: X, Y, Z, A, B, C, D X, Y, Z, A, B, C, D</small>	
APPROVALS	DATE	DataStorageCables.com MINI SAS 26P TO MINI SAS 26P CABLE ASS'Y 0.5M	
DRAWN	Nov.30.09		
CHECKED	Nov.30.09		
APPROVAL	DATE	SIZE	SCALE :
Huang shan	Nov.30.09	C	xx : xx
<small>DO NOT SCALE DRAWING</small>		DRAWING NO.	REV.
		C5656-5MC	A0
		SHEET 1 OF 1	