
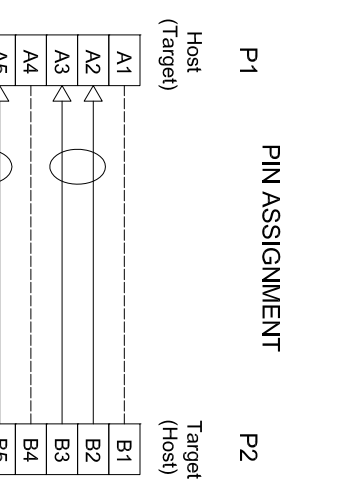


REVISIONS		DATE	APPROVED
LTR	DESCRIPTION	Oct.19.10	JASON
A0	Initial Release for Manufacture		

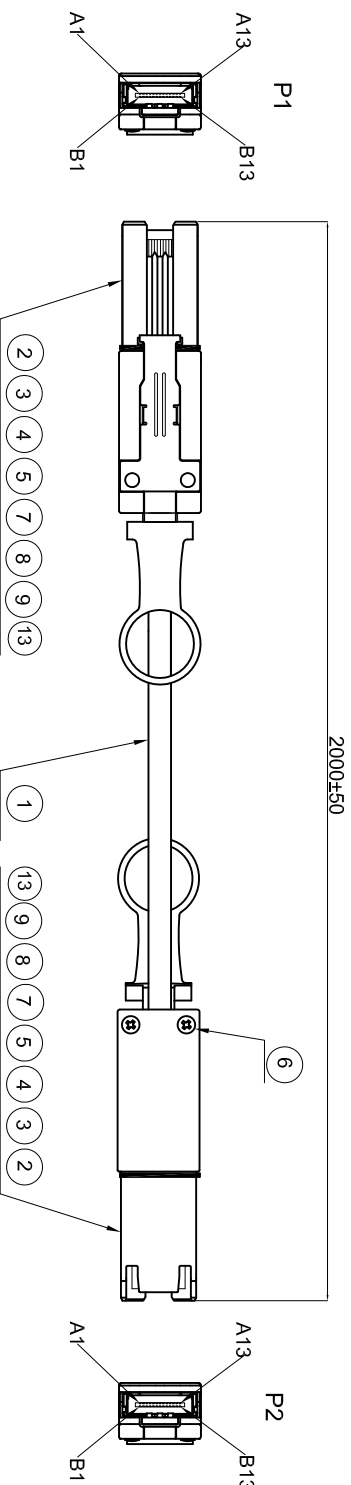

ELECTRICAL TEST:
 1.OPEN / SHORT 100% TEST.
 2.CONTACT RESISTANCE : 1Ω(MAX).
 3. INSULATION RESISTANCE : 20MΩ (MIN).
 4.HI-POT : DC 300V /10MS.

*	4-20-0020-000001	RUBBER BAND	2	PCS
*	4-14-0019-708051	ARI BAG 70*80mm	2	PCS
11	4-15-0001-200201	TUBE OD:0.6mm BK	3.0*16	mm
10	4-15-0043-100201	TUBE OD:8.0MM TRANSPARENT	15	mm
9	4-20-0063-001001	ACETATE TAPE W=10mm BK	120*2	mm
8	4-20-0002-051051	FIOL-CU W=5mm	50*2	mm
7	4-13-0032-M26551	SCREW M2*0.65 NICKEL PLATED	4	PCS
6	4-12-0016-000051	EXT.MINI SAS 26P CONDUCTIVE FOAM	2	PCS
5	3-02-0002-086701	TRL-THERMELT-867	10	G
4	2-70-0005-011551	EXT.MINI SAS 26P ZINE ALLOY BOTTOM SHELL NICKEL PLATED WITH LATCH	2	PCS
3	2-70-0002-011551	EXT.MINI SAS 26P ZINE ALLOY TOP SHELL NICKEL PLATED	2	PCS
2	2-70-0004-011551	EXT.MINI SAS 26P CONNECTOR (MINI SAS 4X)	2	PCS
1	1-67-0005-200201	[(28AWG*2P+FILLER+BINDE)+6P*28AWG+BIINDER+AL.ML.+BRAID+JACKET	1960	mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT

DIMENSION TOLERANCES ARE: DECIMALS ANGLES		DO NOT SCALE DRAWING	
APPROVALS		DATE	
DRAWN FangQing-Jiang	CHECKED ChunHua-Yan	Oct.19.10	
APPROVAL Huang-Shan		Oct.19.10	
DataStorageCables.com		EXT.MINI SAS 26P TO EXT.MINI SAS 26P CABLE ASSY 2M	
SCALE : xx : xx	DRAWING NO. C5656-2MC	REV. A0	
ID NO.	SHEET 1 OF 1		