


1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					
◇	改為RoHS材料	06/22/06	KU.					

RoHS

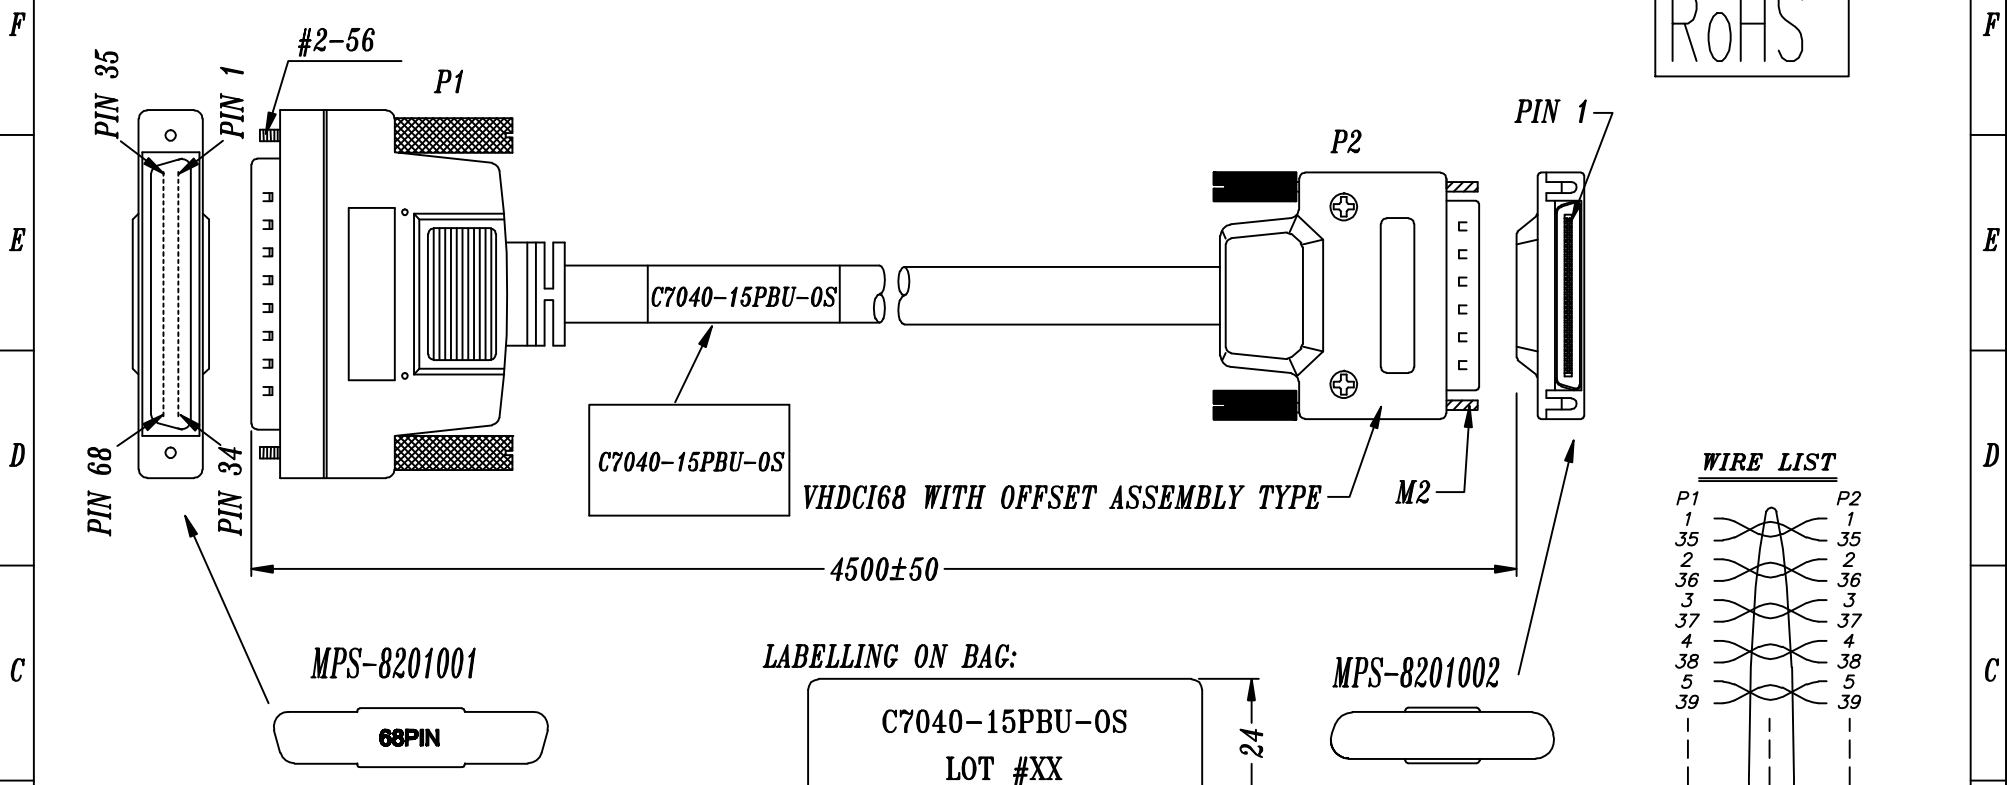

WIRE LIST

P1		P2
1	↔	1
35	↔	35
2	↔	2
36	↔	36
3	↔	3
37	↔	37
4	↔	4
38	↔	38
5	↔	5
39	↔	39
...
30	↔	30
64	↔	64
31	↔	31
65	↔	65
32	↔	32
66	↔	66
33	↔	33
67	↔	67
34	↔	34
68	↔	68
SHELL		SHELL

MATERIAL RoHS COMPLIANT:

NOTE:

1. CABLE SPEC.: UL-20276, 30AWG, ALUMINIUM FOIL+BRAIDED(Madison 68KBKLF045), BLACK SHIELDED: ALUMINIUM FOIL & TINNED COPPER BRAIDING
CONDUCTOR INSULATON MATERIAL: FOAMED POLYETHYLENE+SKIN
2. CONNECTORS: P1 SCSI-3 HPDB 68PIN MALE IDC MOLDED TYPE W/THUMB SCREW #2-56
3. CONNECTORS: P2: VHDCI 68PIN MALE ASSEMBLY TYPE W/THUMB SCREW M2

DataStorageCables.com	DESC.	SCSI 68P (M) TO VHDCI 68P (M) W/THUMB SCREW		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	⊕
	P/N	C7040-15PBU-0S	CUSTOMER P/N	C7040-15PBU-0S			Ku.	X.X : ±0.1 X.XX : ±0.05 X.XXX : ±0.02	DATE	07/27/05	DWG NO:	DWG\RC\1564

1 2 3 4 5 6 7 8 9