
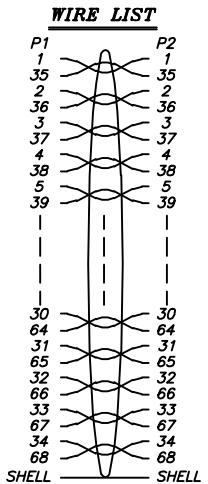
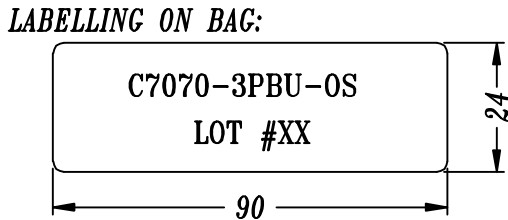


1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

RoHS

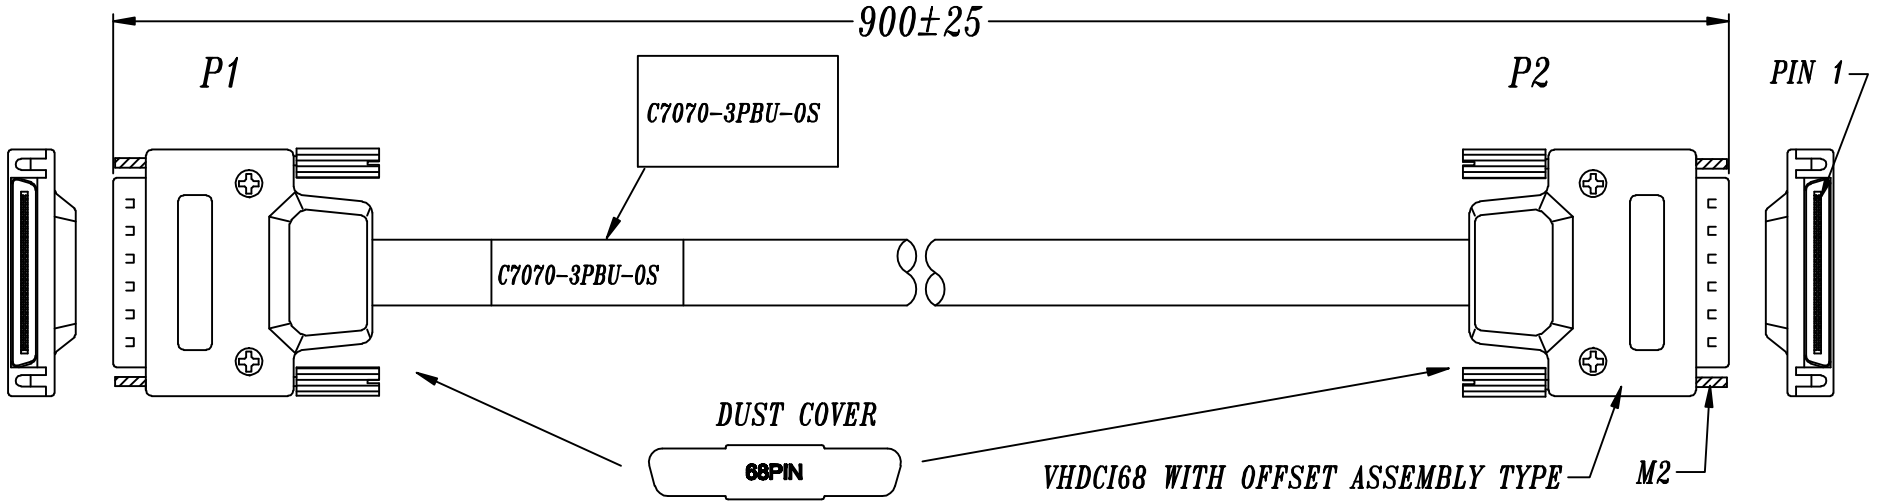

MATERIAL RoHS COMPLIANT:

NOTE:
 1. CABLE SPEC.: UL-20276, 30AWG, ALUMINIUM FOIL+BRAIDED(Madison 68KBKLF045), BLACK
 SHIELDED: ALUMINIUM FOIL & TINNED COPPER BRAIDING
 CONDUCTOR INSULATON MATERIAL: FOAMED POLYETHYLENE+SKIN

3. CONNECTORS: P1&P2: VHDCI 68PIN MALE ASSEMBLY TYPE W/THUMB SCREW M2

DataStorageCables.com	DESC.	VHDCI 68P (M) *2 W/THUMB SCREW		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	
	P/N	C7070-3PBU-OS	CUSTOMER P/N	C7070-3PBU-OS			Ku.	X.X : ±0.1 X.XX : ±0.05 X.XXX : ±0.02	DATE	09/20/06	DWG NO:	