



1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					


RoHS

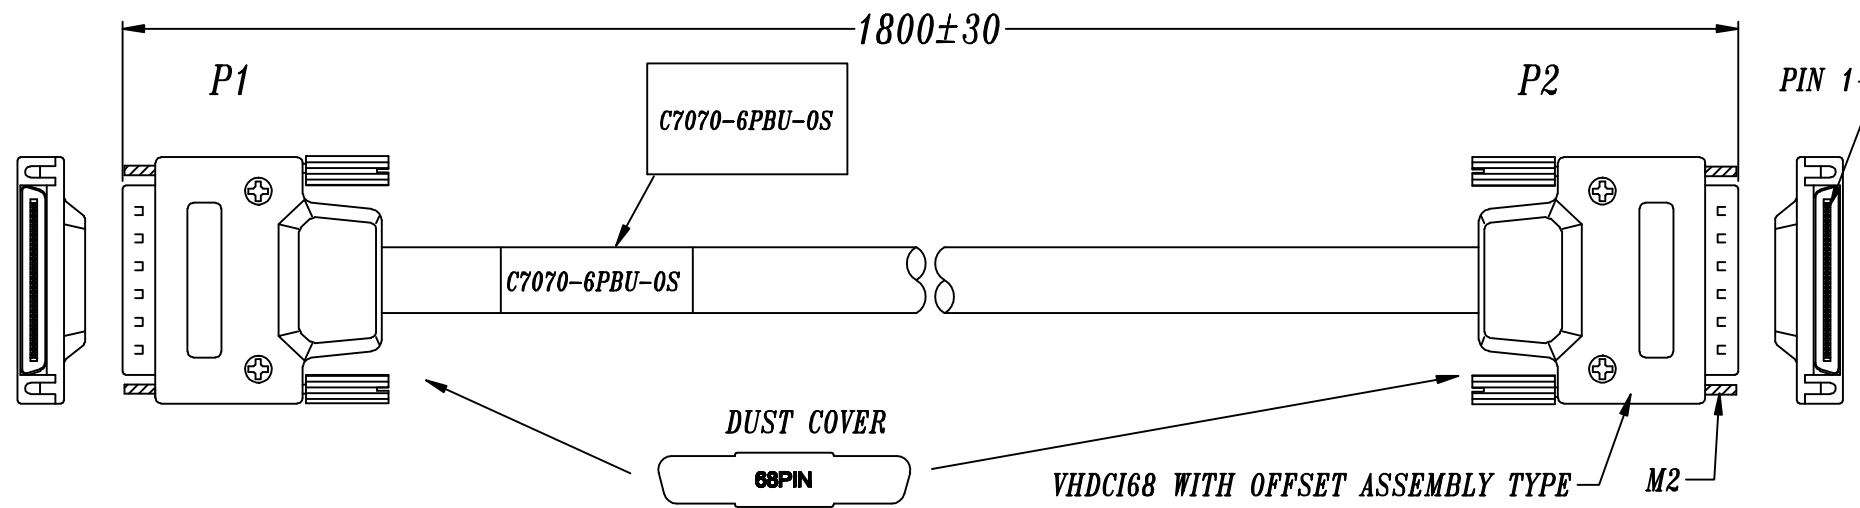

LABELLING ON BAG:

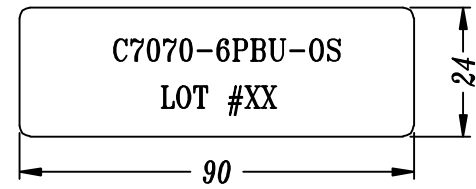

WIRE LIST

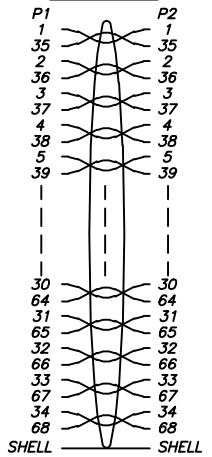

MATERIAL RoHS COMPLIANT:

NOTE:

- CABLE SPEC.: UL-20276, 30AWG, ALUMINIUM FOIL+BRAIDED(Madison 68KBKLF045), BLACK
SHIELDED: ALUMINIUM FOIL & TINNED COPPER BRAIDING
CONDUCTOR INSULATON MATERIAL: FOAMED POLYETHYLENE+SKIN

3. CONNECTORS: P1&P2: VHDCI 68PIN MALE ASSEMBLY TYPE W/THUMB SCREW M2

DataStorageCables.com	DESC.	VHDCI 68P (M) *2 W/THUMB SCREW		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	
	P/N	C7070-6PBU-OS	CUSTOMER P/N	C7070-6PBU-OS			Ku.	X.X : ±0.1 X.XX : ±0.05 X.XXX : ±0.02	DATE	05/17/06	DWG NO:	

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---