REV.	REMARK	DATE	SIGN.

LABELLING ON BAG:

C9095-10M
1GB Cable
LOT #XX

36

110

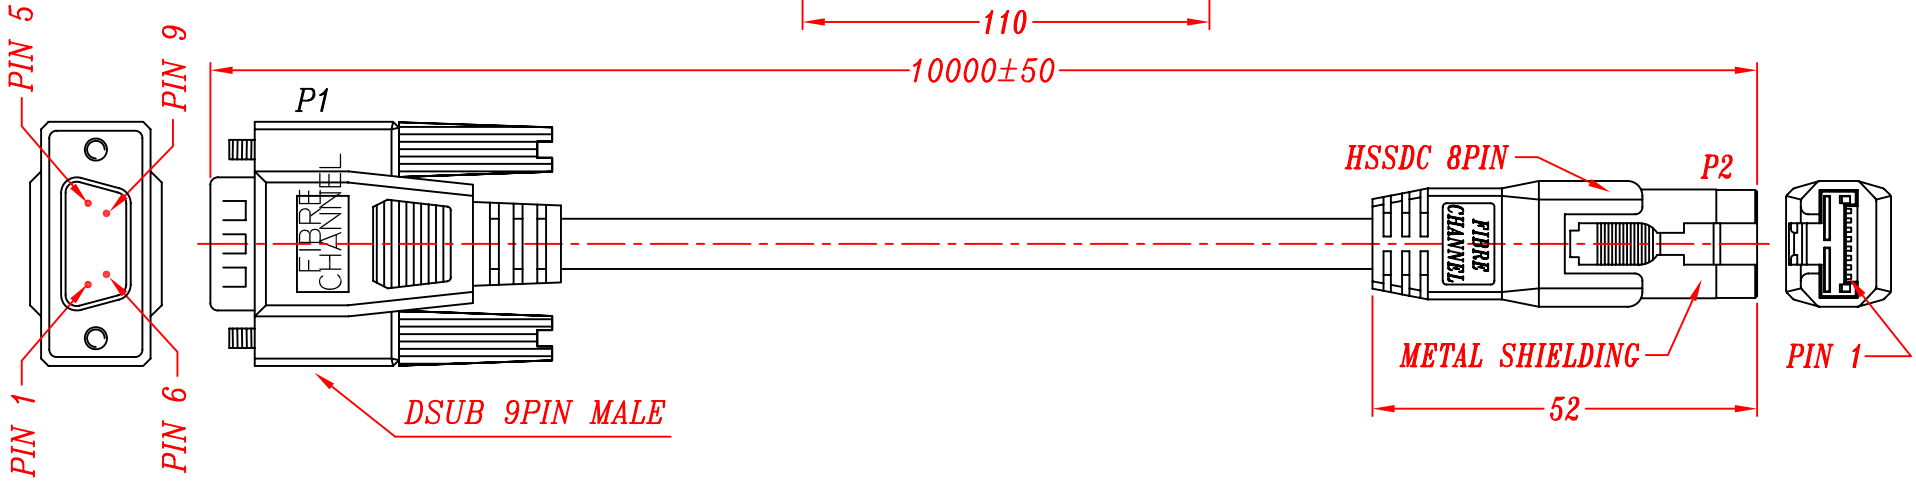

1.CABLE:
CONDUCTOR: TWO TWISTED PAIRS, 28 AWG 7/38 TIN PLATED COPPER.
INNER SHIELD: ALUMINUM/POLYESTER,ALUM SIDE FACING OUT, 25% OVERLAP
OUTER SHIELD: 36AWG TIN PLATED COPPER BRAID, 85% COVERAGE
JACKET: 0.64 mm OF PVC.COLOR BLACK
DIAMETER: 5.59±0.38mm
PRINT LEGEND: "TYPE CL2 75°C 28AWG(UL). CSA TYPE
DIFFERENTIAL IMPEDANCE: 150±7 OHMS @TDR
2.CONNECTOR:P1 DSUB 9PIN MALE CRIMPING W/30U" GOLD PLATING WITH THUMBSCREWS #4-40 COPPER FOIL 360° SHIELDING
3.CONNECTOR:P2 HSSDC 8PIN MALE W/30U" GOLD PLATING COLOR: BLACK
4.LABELLING CUSTOMER PART NO. ON THE PLASTIC BAG.

WIRING SCHEMATIC

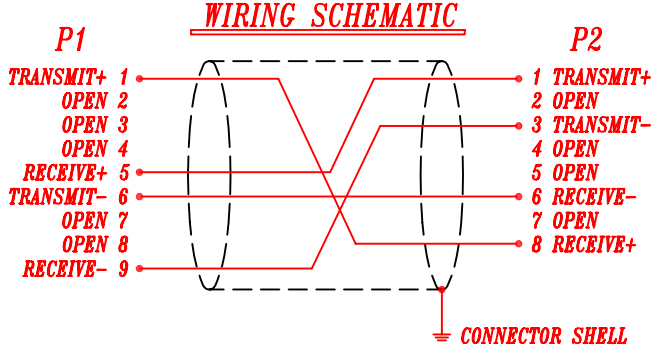

DataStorageCables.com	DESC.	DSUB 9PIN MALE TO HSSDC 8PIN (28AWG)		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm
	P/N	C9095-10M	CUSTOMER P/N			LAI.	X.X : ±0.1 X.XX : ±0.05 X.XXX : ±0.02	DATE	11/24/2K	DWG NO:	DWG\RC\454