


REV.	REMARK	DATE	SIGN.						
------	--------	------	-------	--	--	--	--	--	--


**LABELLING ON BAG:**

C9095-25M-Eq  
1GB Cable  
LOT #XX

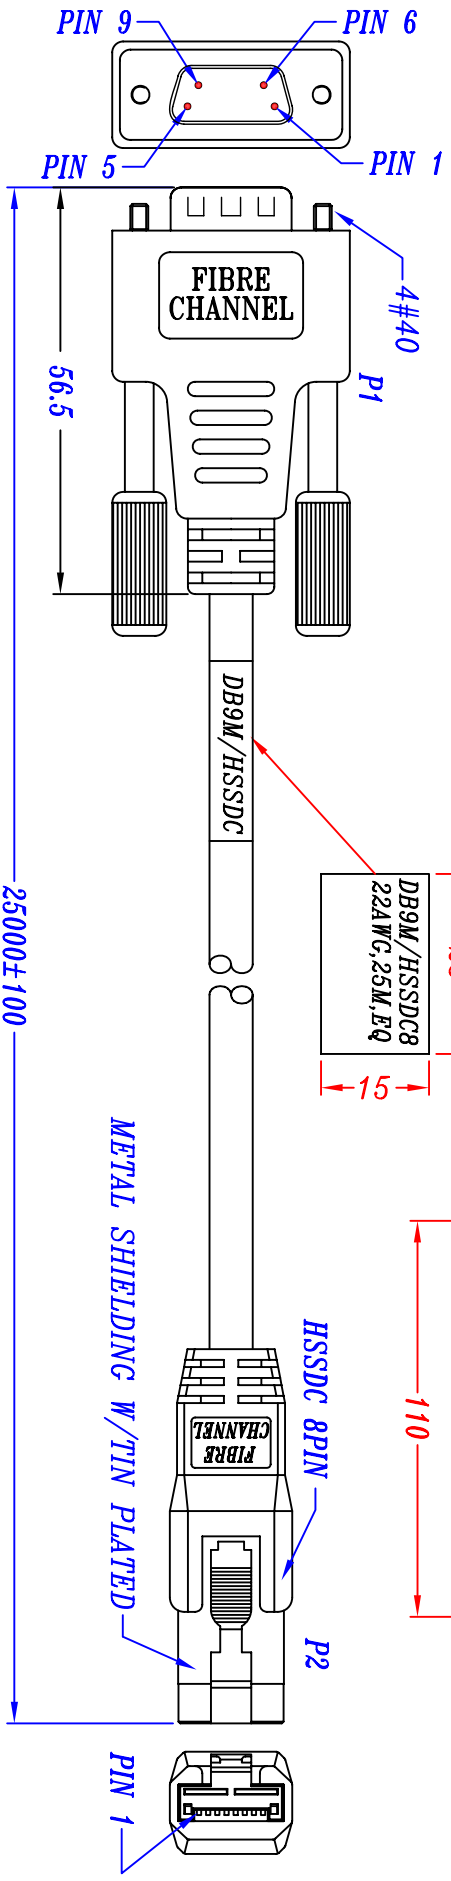

**1. CABLE:**  
**CONDUCTOR:** TWO TWISTED PAIRS, 22 AWG SOLID TIN PLATED COPPER.  
**INNER SHIELD:** ALUMINUM/POLYESTER TAPE, ALUM SIDE FACING OUT, 25% OVERLAP  
**OUTER SHIELD:** 38AWG TIN PLATED COPPER BRAID, 85% COVERAGE  
**JACKET:** 0.635 mm OF PVC. COLOR BLACK  
**DIAMETER:** 7.62±0.25mm  
**PRINT LEGEND:** "TYPE CL2 75°C 24AWG(U.L). CSA TYPE

**DIFFERENTIAL IMPEDANCE:** 150±7 OHMS @TDR  
**2. CONNECTOR:** P1 DSUB 9PIN MALE SOLDER TYPE W/30U" GOLD PLATING WITH THUMBSCREWS #4-40 COPPER FOIL 360° SHIELDING  
**3. CONNECTOR:** P2 HSSDC 8PIN MALE W/30u" GOLD PLATING SOLDER TYPE COLOR: BLACK  
**4. LABELLING CUSTOMER PART NO. ON THE PLASTIC BAG.**

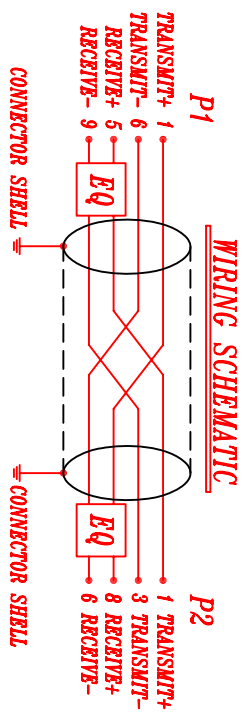

DESC.	DSUB 9PIN (M) ~ HSSDC 8PIN (22AWG)EQ	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm
P/N	C9095-25M-Eq	CUSTOMER P/N		LAI.	XX : ±0.1 XXX : ±0.05 XXXX : ±0.02	DATE	11/24/2K	DRG NO.	DWG/RC/460

DataStorageCables.com