



1	2	3	4	5	6	7	8	9	
REV.	REMARK	DATE	SIGN.						
⬆	ADD ID IC	08/13/03	YEH						

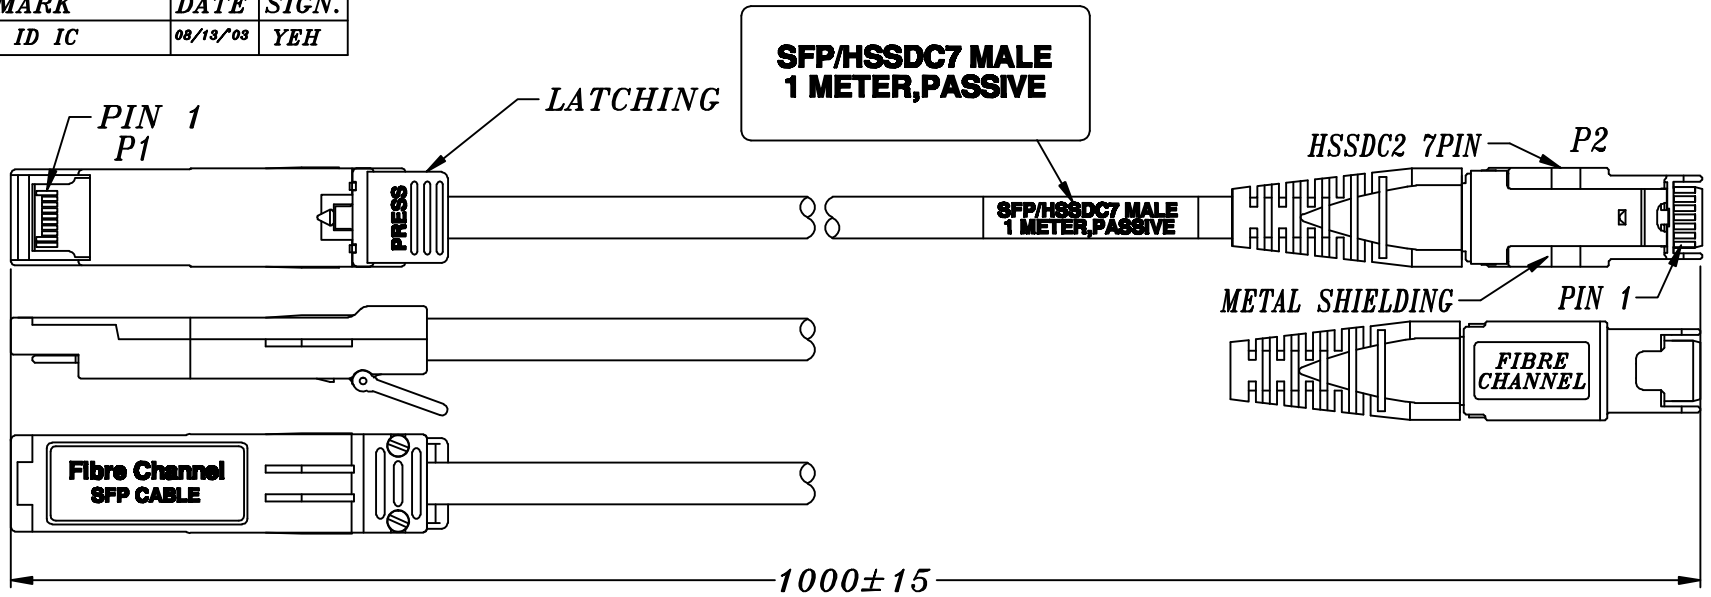

1. CABLE:
 CONDUCTOR: TWO TWISTED PAIRS, 27AWG SOLID SILVER PLATED COPPER.
 INNER SHIELD: ALUMINUM/POLYESTER, ALUM SIDE FACING OUT, 25% OVERLAP.
 OUTER SHIELD: 38AWG TIN PLATED COPPER BRAID, 85% COVERAGE
 JACKET: 0.635 mm OF PVC. COLOR BLACK
 DIAMETER: 5.59±0.254mm
 PRINT LEGEND: "TYPE CL2 75°C 27AWG(UL)MADISON CABLE CORP.
 CSA TYPE CMH 60°C TurboQuad™ Gold"
 DIFFERENTIAL IMPEDANCE: 150±7 OHMS @TDR

LABELLING ON BAG:

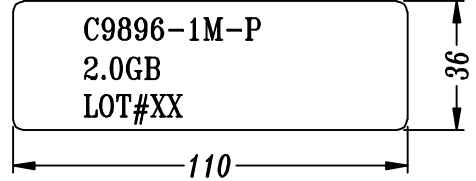

2. CONNECTOR: P1 ZINC DIE CASTING, NICKEL PLATING.
 LATCH: ABS RESIN UL94V, COLOR IN BLACK.
 P.C.B.: 4 LAYERS, FR4. 30U" GOLD ON GOLDEN FINGERS.
3. CONNECTOR: P2 HSSDC 7PIN MALE W/30U" GOLD PLATING COLOR: BLACK
- ⬆ 4. SERIAL ID IC: MICROSHIP 24LC01B OR EQUIVALENT.
5. PASSIVE TYPE.

WIRING CHART			
P1 END		P2 END	
P1 PAD	SIGNAL	P1 PAD	SIGNAL
12	R-	6	Tx-
13	R+	5	Tx+
18	T+	3	Rx+
19	T-	2	Rx-

DataStorageCables.com	DESC.	SFP/HSSDC2 7 CABLE 27AWG (2GHZ)FIBRE CHANNEL		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	⊕
	P/N	C9896-1M-P	CUSTOMER P/N	C9896-1M-P		T.C.YEH		DATE	08/13/03	DWG NO:	DWC\RC\531	