



1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

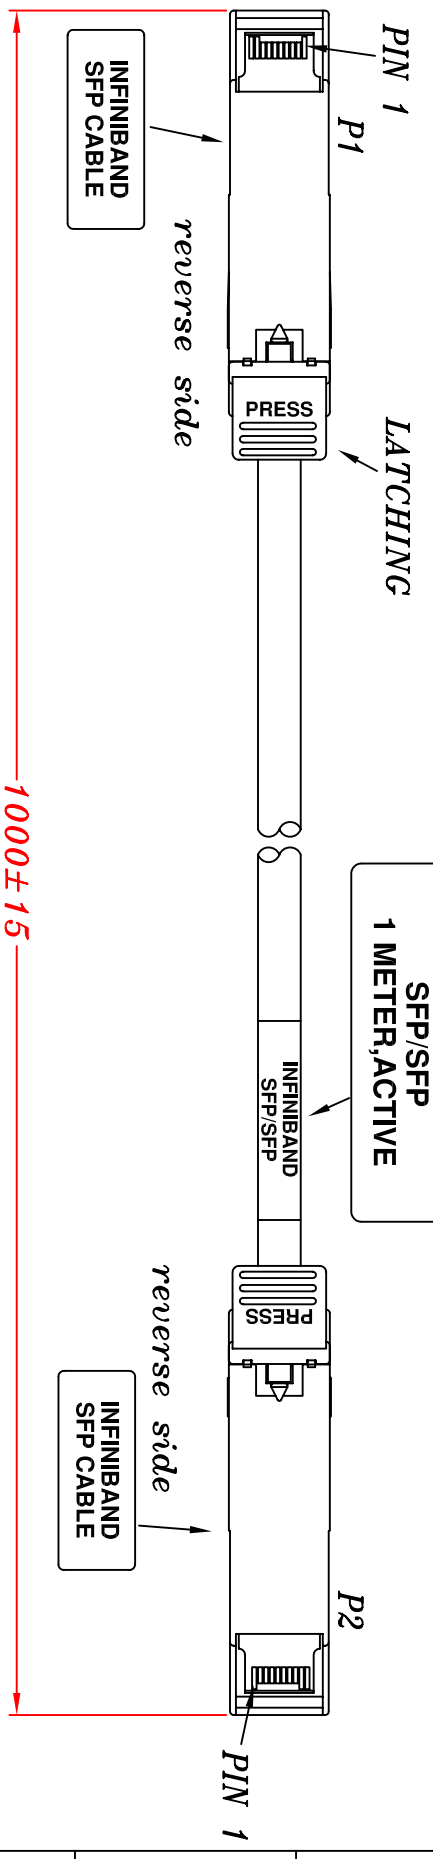

- 1. CABLE:**  
**CONDUCTOR:** TWO TWISTED PAIRS, 24AWG SOLID SILVER PLATED COPPER.  
**INSULATION:** FOAM POLYOLEFIN.  
**PAIR:** 2 SINGLES LAID FLAT AND PARALLEL.  
**PAIR DRAIN WIRE:** 26AWG SOLID SILVER PLATED COPPER.  
**PAIR SHIELD:** ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 25% OVERLAP. COLOR-YELLOW.  
**INNER SHIELD:** ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE FACING IN, 25% OVERLAP. COLOR-YELLOW.  
**OUTER SHIELD:** 36AWG TIN PLATED COPPER BRAID, 85% COVERAGE.  
**DIAMETER:** 6.86mm NOMINAL. COLOR: BLACK.  
**PRINT LEGEND:** "MADISON CABLE CORP. TYPE CL2 75°C 24AWG (UL) TurboTwin™"  
**DIFFERENTIAL IMPEDANCE:** 100±5 OHMS @TDR  
**UL LISTING:** TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE. TARBO TWIN™
- 2. HOOD:** ZINC DIE CASTING, NICKEL PLATING.  
**3. LATCH:** ABS RESIN UL94V, COLOR IN BLACK.  
**4. P.C.B.:** 4 LAYERS, FR4. 30U" GOLD ON GOLDEN FINGERS, COLOR: RED.  
**5. SERIAL ID IC:** Microchip 24LC01B or equivalent  
**6. ACTIVE TYPE.**

**LABELLING ON BAG:**

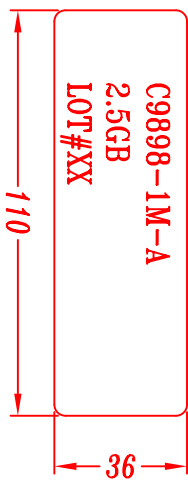

**WIRING CHART**

P1 END		P2 END	
P1 PAD	SIGNAL	P1 PAD	SIGNAL
12	RX-	19	TX-
13	RX+	18	TX+
	GROUND		GROUND
18	TX+	13	RX+
19	TX-	12	RX-
	GROUND		GROUND

DataStorageCables.com

DESC.	SFP/SFP CABLE 24AWG FOR INFINIBAND	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm
P/N	C9898-1M-A	CUSTOMER P/N		YEH		DATE	07/22/03	DWG NO.	DWG/RC/253