


1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

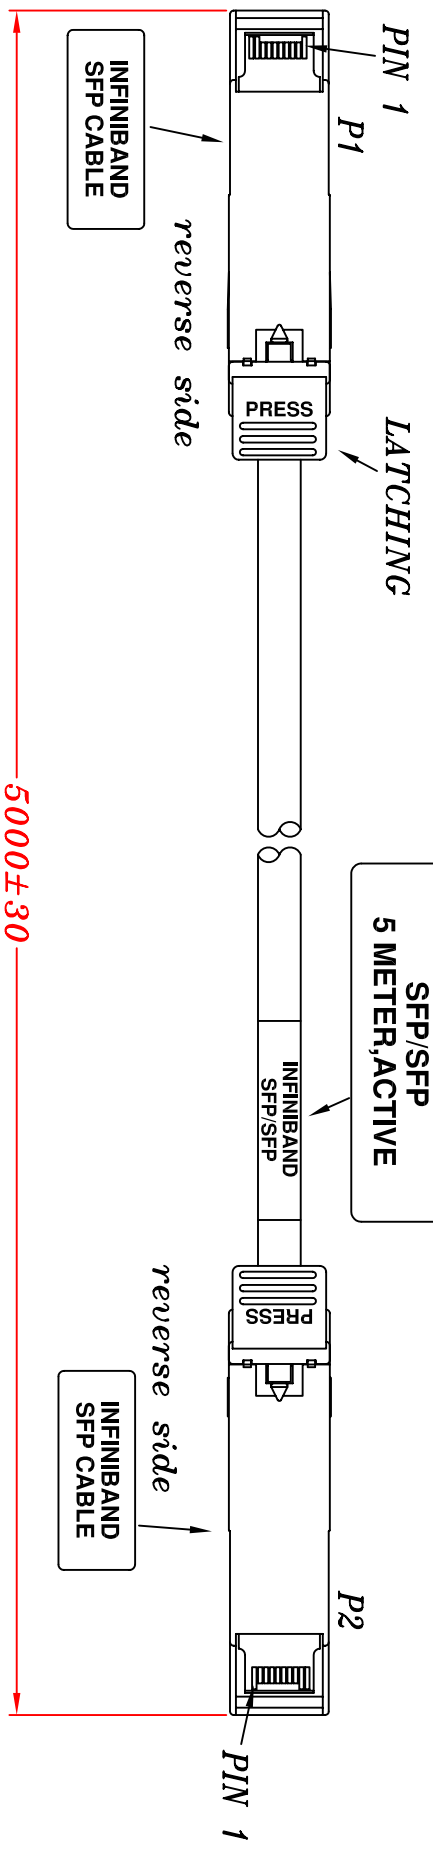

- 1. CABLE:**
CONDUCTOR: TWO TWISTED PAIRS, 24AWG SOLID SILVER PLATED COPPER.
INSULATION: FOAM POLYURETHAN.
PAIR: 2 SINGLES LAID FLAT AND PARALLEL.
PAIR DRAIN WIRE: 26AWG SOLID SILVER PLATED COPPER.
PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 25% OVERLAP. COLOR-YELLOW.
INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE FACING IN, 25% OVERLAP. COLOR-YELLOW.
OUTER SHIELD: 36AWG TIN PLATED COPPER BRAID, 85% COVERAGE.
DIAMETER: 6.86mm NOMINAL. COLOR: BLACK.
PRINT LEGEND: "MADISON CABLE CORP. TYPE CL2 75°C 24AWG (UL) TurboTwin™"
DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE. TARBO TWIN™
- 2. HOOD:** ZINC DIE CASTING, NICKEL PLATING.
3. LATCH: ABS RESIN UL94V, COLOR IN BLACK.
4. P.C.B.: 4 LAYERS, FR4. 30U" GOLD ON GOLDEN FINGERS, COLOR: RED.
5. SERIAL ID IC: Microchip 24LC01B or equivalent
6. ACTIVE TYPE.

LABELLING ON BAG:

C9898-5M-A
 2.5GB
 LOT#XX
 110
 36

WIRING CHART

P1 END		P2 END	
P1 PAD	SIGNAL	P1 PAD	SIGNAL
12	RX-	19	TX-
13	RX+	18	TX+
	GROUND		GROUND
18	TX+	13	RX+
19	TX-	12	RX-
	GROUND		GROUND

DataStorageCables.com

DESC.	SFP/SFP CABLE 24AWG FOR INFINIBAND	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm
P/N	C9898-5M-A	CUSTOMER P/N		YEH		DATE	07/22/03	DWG NO.	DWG/RC/253