
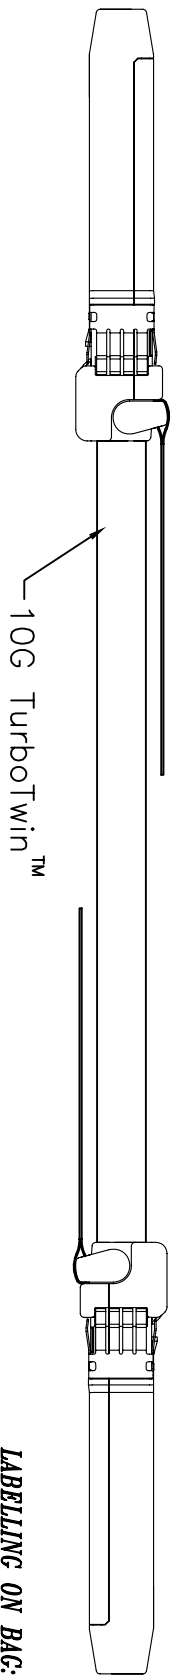


REV.	REMARK	DATE	SIGN.
------	--------	------	-------

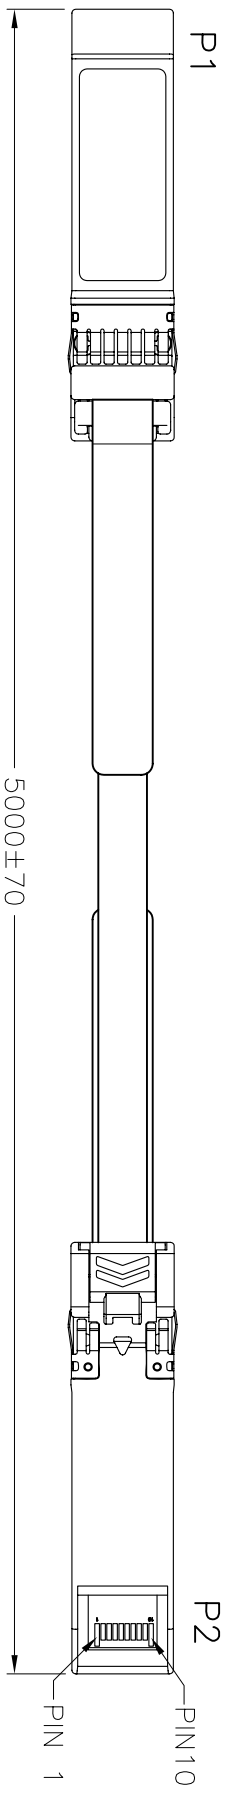

1. CABLE:  
 CONDUCTOR: 24AWG SOLID SILVER PLATED COPPER.  
 INSULATION: FOAM POLYOLEFIN.  
 PAIR: 2 SINGLES LAID FLAT AND PARALLEL.  
 PAIR DRAIN WIRE: 26AWG SOLID SILVER PLATED COPPER.  
 PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 25% OVERLAP. COLOR-YELLOW.  
 INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE PACING OUT, 25% OVERLAP.  
 OUTER SHIELD: 36AWG TIN PLATED COPPER BRAID, 85% COVERAGE.  
 DIAMETER: 6.86mm NOMINAL. COLOR: BLACK.  
 PRINT LEGEND: "TYPE CL2 75°C 24AWG (UL) MADISON CABLE CSA  
 AWM II A/B 75C 30V FT4 TurboTwin™ 10G RoHS COMPLIANT"  
 DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR  
 UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL  
 ELECTRICAL CODE. TurboTwin™  
 2. HOOD: ZINC DIE CASTING, NICKEL PLATING.  
 3. LATCH: PC RESIN UL94V, COLOR IN BLACK.  
 4. P.C.B.: 4 LAYERS, FR4. 30U" GOLD ON GOLDEN FINGERS.  
 5. SERIAL ID IC: THE MATE COMPANY, P/O# & P/N#...

WIRING CHART			
P1 END		P2 END	
P1 PAD	SIGNAL	P2 PAD	SIGNAL
12	RX-	19	TX-
13	RX+	18	TX+
GROUND		GROUND	
18	TX+	13	RX+
19	TX-	12	RX-
GROUND		GROUND	

DataStorageCables.com

DESC.	SFP+ 5M CABLE 24AWG PASSIVE	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm
P/N	C9999-5M-P	CUSTOMER P/N		SHIU		DATE	04/23/09	DWG NO.	DWG/RC/3084
1	2	3	4	5	6	7	8	9	