


1	2	3	4	5	6	7	8	9	
REV.	REMARK	DATE	SIGN.						


RoHS

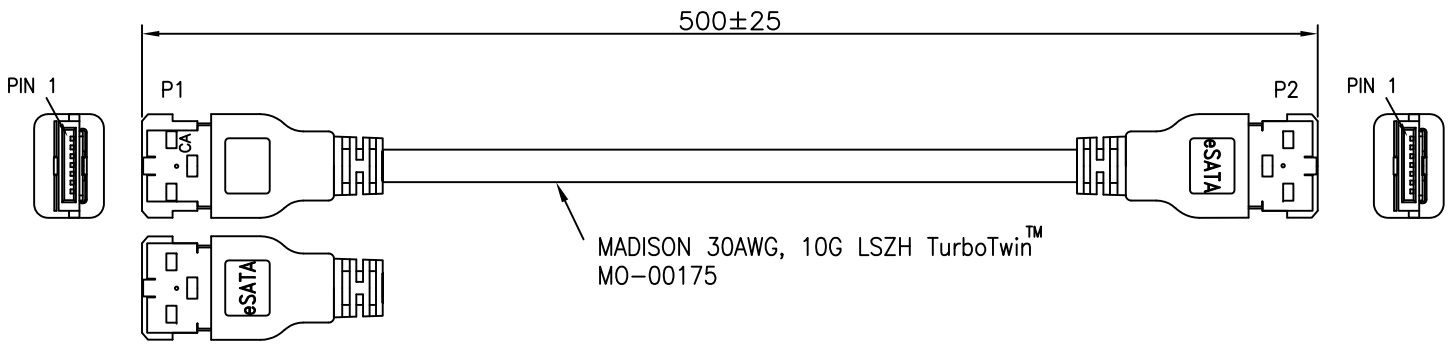


Material RoHS Compliant:

1.CABLE: MADISON P/N 04KB2LF013, 30AWG LZSH CABLE, UNICONN P/N MO-00175.
 CONDUCTOR: 30 AWG SOLID SILVER PLATED COPPER.
 INSULATION: FOAM POLYOLEFIN, COLOR - NATURAL.
 PAIR: 2 SINGLES LAID FLAT AND PARALLEL.
 CORE: 2 PAIRS
 PAIR DRAIN: 30 AWG SOLID SILVER PLATED COPPER.
 PAIR SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE FACING IN.
 INNER SHIELD: ALUMINUM/POLYESTER/ALUMINUM TAPE, 25% OVERLAP.
 OUTER SHIELD: 38 AWG TIN PLATED COPPER BRAID, 85% COVERAGE.
 JACKET: NON-HALOGEN POLYOLEFIN, COLOR - BLACK.
 DIAMETER: 4.445±0.254 MM
 DIFFERENTIAL IMPEDANCE: 100 ± 5 OHM @TDR.
 PRINTED LEGEND: "MADISON CABLE (UL) TYPE CL2 75°C 30 AWG CSA TYPE CMG 75°C FT4 TurboTwin™ 10G 101-8873 NON-HALOGEN RoHS COMPLIANT {D/C}"
 APPROVAL: UL TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE.

4.LABELING ON BAG:



WIRING DIAGRAM

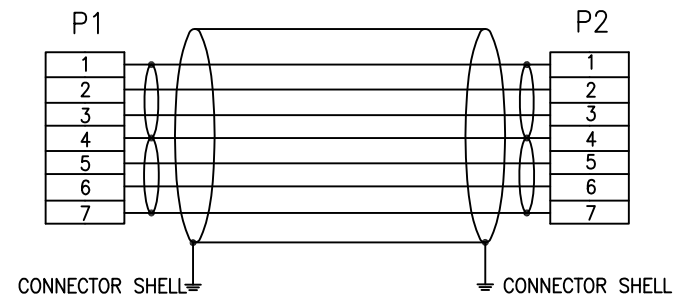

2.CONNECTORS:

- P1,P2: eSATA CABLE PLUG (P/N: USAT-F075SE0G)
- (1) HOUSING: PBT G.F.30%, UL94V-0, COLOR: BLACK
- (2) TERMINAL: GOLD PLATED PHOSPHOR BRONZE(CONTACT AREA)
- (3) SHELL PLATING: NICKEL PLATED BRASS

3.FOR SATA 3G USE.



DESC.	eSATA TO eSATA CABLE ASS'Y			APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm	
P/N	ESATA-0.5M-LS01	CUSTOMER P/N	ESATA-0.5M-LS01			Sino		DATE	03/03/'17	DWG NO:		

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---