



1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

RoHS

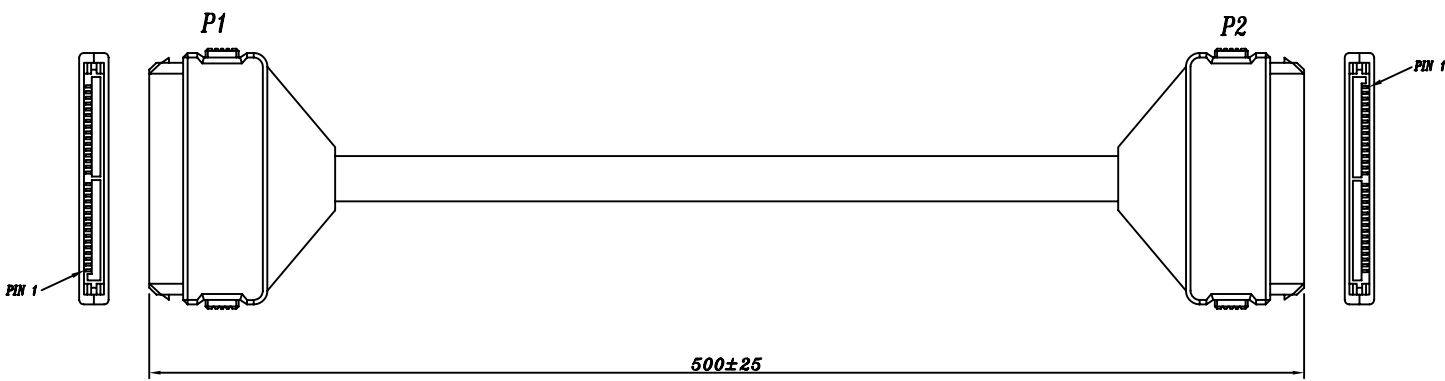

LABELLING ON BAG:



- 1.CABLE:
CONDUCTOR: AMPHENOL 30AWG 8PAIRS INTERNAL CABLE
- 2.CONNECTOR:
P1, P2:SAS4X 32PIN RECEPTACLE WITH GOLD PLATING.
- 3.WIRELIST:
CONTROLLER TO BACKPLANE OR CONTROLLER TO CONTROLLER.
SAME CONNECTION BUT DIFFERENT PIN DEFINATION.

DataStorageCables.com	DESC.	SAS 4X TO SAS 4X INTERNAL CABLE ASSEMBLY	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	
	P/N	I3232-.5M	CUSTOMER P/N			PPP	DATE	05/10/05	DWG NO:	DWG\B\929	
1	2	3	4	5	6	7	8	9			

1		2		3		4		5		6		
REV.	REMARK	DATE	SIGN.									
WIRING DIAGRAM(CONTROLLER TO BACKPLANE)												
SAS4X INTERNAL						SAS4X INTERNAL						
REC.	PIN	SIGNAL				REC.	PIN	SIGNAL				
P1	32	GROUND				P2	1	GROUND				
	31	TX3+					2	RX3+				
	30	TX3-					3	RX3-				
	29	GROUND					4	GROUND				
	28	RX3-					5	TX3-				
	27	RX3+					6	TX3+				
	26	GROUND					7	GROUND				
	25	TX2+					8	RX2+				
	24	TX2-					9	RX2-				
	23	GROUND					10	GROUND				
	22	RX2-					11	TX2-				
	21	RX2+					12	TX2+				
	20	GROUND					13	GROUND				
	19	SIDEBAND 5					14	SIDEBAND 5				
	18	SIDEBAND 4					15	SIDEBAND 4				
	17	SIDEBAND 3					16	SIDEBAND 3				
	16	SIDEBAND 2					17	SIDEBAND 2				
	15	SIDEBAND 1					18	SIDEBAND 1				
	14	SIDEBAND 0					19	SIDEBAND 0				
	13	GROUND					20	GROUND				
12	TX1+				21	RX1+						
11	TX1-				22	RX1-						
10	GROUND				23	GROUND						
9	RX1-				24	TX1-						
8	RX1+				25	TX1+						
7	GROUND				26	GROUND						
6	TX0+				27	RX0+						
5	TX0-				28	RX0-						
4	GROUND				29	GROUND						
3	RX0-				30	TX0-						
2	RX0+				31	TX0+						
1	GROUND				32	GROUND						
DataStorageCables.com		DESC.		SAS 4X TO SAS 4X INTERNAL CABLE ASSEMBLY								
		P/N		I3232-.5M				CUSTOMER P/N				
		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm			
		PPP		DATE		05/10/05		DWC NO:		DWC\B\929		