
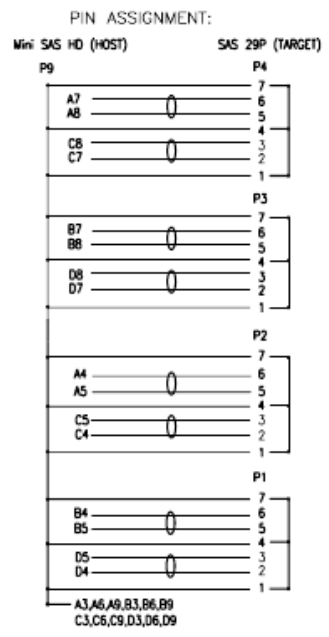


1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F

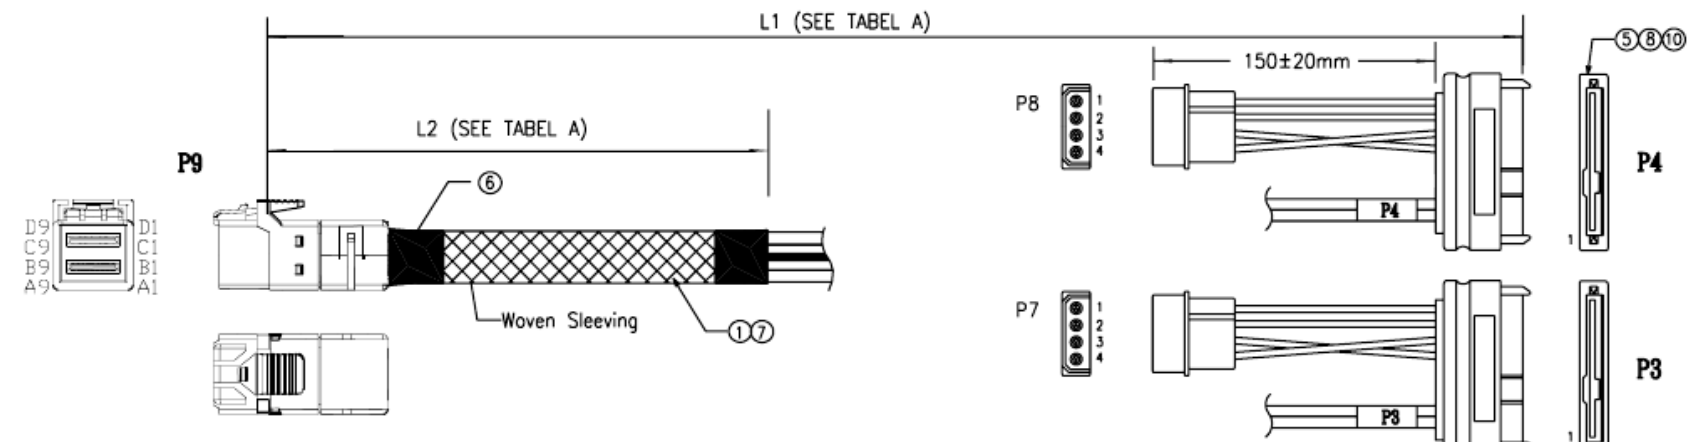

**Tabel A. UNIT: mm**


PART NO.	" L1 " DIM.	" L2 " DIM.
I3529-.5MCT	500±30mm	250±30mm
I3529-1MCT	1000±60mm	750±40mm

**ELECTRICAL CHARACTER:**

- a. 100% OPEN&SHORT TESTING
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
- c. INSULATION RESISTANCE:10M Ohm(Min)
- d. CONDUCTIVE RESISTANCE:5 Ohm(Max).

**RoHS Compliant**

NO.	PART NAME	DESCRIPTION
10	PVC	PVC 45% BLACK UL94V-0
9	LABEL	LABEL PRINT P1 & P2 & P3 & P4
8	CONN 2	SAS 29P RECEPTACLE BLACK
7	TUBE	WOVEN SLEEVING TUBE BLACK
6	H.S.T	HEAT SHRINK TUBE BLACK ID: 9.5mm
5	PE	PE LOW DESNIGE
4	PBT	PBT BLACK
3	CONN 1	MINI SAS HD END
2	CONN 3	4P POWER CONNECTOR PLUG
1	CABLE 1	(30AWG*2C+2D)*AL.MYLAR 6G CABLE

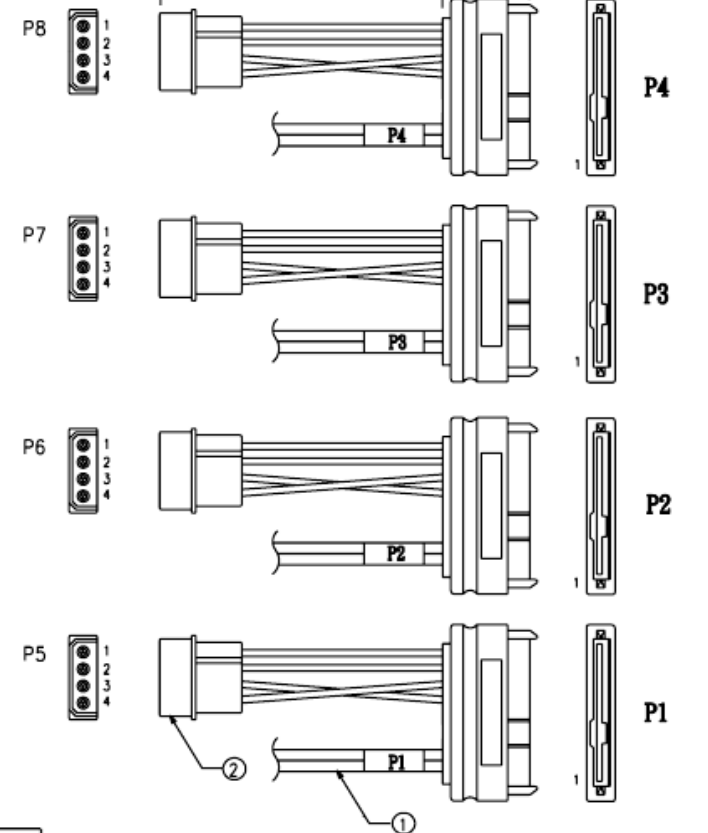

TOLERANCES		DataStorageCables.com
±	±	
UNIT	SCALE NON	PRODUCT SFF-8643 (Mini SAS HD) to SAS 29P*4
PROJECTION		
DWN. Lion 11.06.13	PART NO. I3529-xMCT	SHEET 1/
CHKD.	DWG NO.	REV B

1 2 3 4 5 6 7 8