

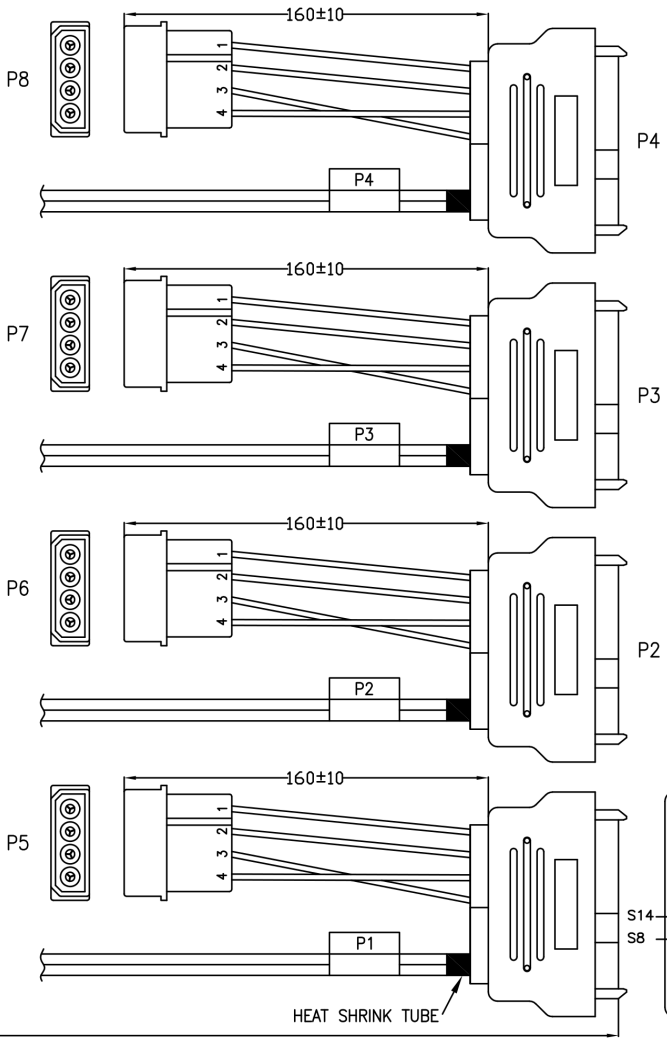

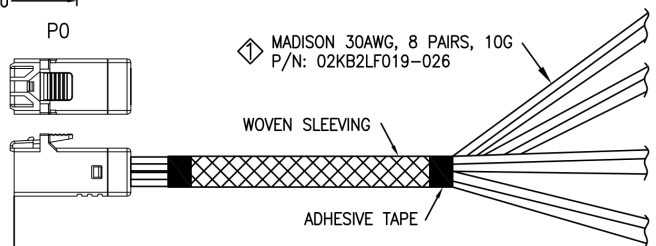
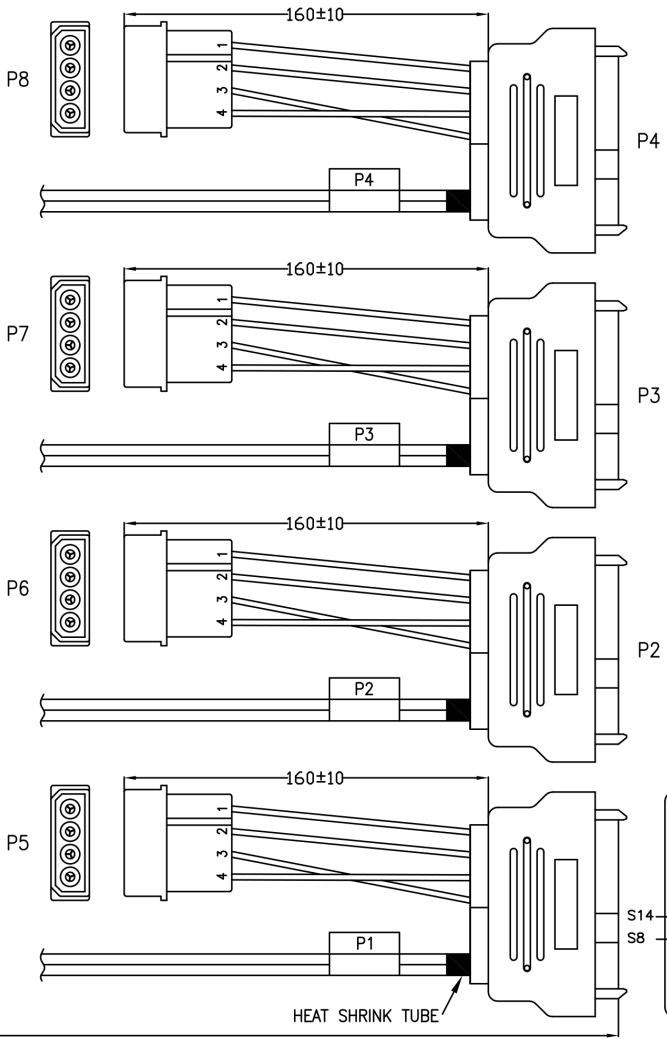




	1	2	3	4	5	6	7	8	9				
	REV.	REMARK	DATE	SIGN.									
	◇	CHANGE CABLE & PCB	01/25/'13										
F	<p>MATERIAL RoHS COMPLIANT:</p> <p>◇ 1.CABLE: CONDUCTOR: 30AWG SOLID SILVER PLATED COPPER. INSULATION: FOAM POLYOLEFIN. PAIR: 2 SINGLES LAID FLAT AND PARALLEL. PAIR DRAIN WIRE: 30AWG SOLID TIN PLATED COPPER. PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 25% OVERLAP. DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR UL RECOGNIZED: AWM STYLE 21490 80°C 30 VOLTS.</p> <p>2.CONNECTOR: P0: Mini SAS HD 4i CABLE PLUG (SFF-8643) ◇ (1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS, WITHOUT CARBON (P/N: MPCB-040115LF REV.A / MPCB-040116LF REV.A) (2) HOUSING: PBT, BLACK. P1-P4: SAS DRIVE REC. P5-P8: 4 POSITION DC POWER PLUG POWER CABLE: UL 1007 18AWG 80°C 300V</p> <p>3.LABELING ON BAG:</p>									F			
E										E			
D	<p>P0</p>  <p>◇ MADISON 30AWG, 8 PAIRS, 10G P/N: 02KB2LF019-026</p> <p>WOVEN SLEEVEING</p> <p>ADHESIVE TAPE</p> 									D			
C										C			
B										B			
A										A			
DATA STORAGE CABLES		DESC.	Mini SAS HD 4i TO 4*SAS drive cable rec. with power cable ass'y		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm	⌀
		P/N	I3529-1M	CUSTOMER P/N					DATE	01/25/'13	DWG NO:	DWG\RC\5965	
1	2	3	4	5	6	7	8	9					