

REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD
-----	------	-----	-------------	------	---------	------

PIN ASSIGNMENT:

Mini SAS HD Mini SAS

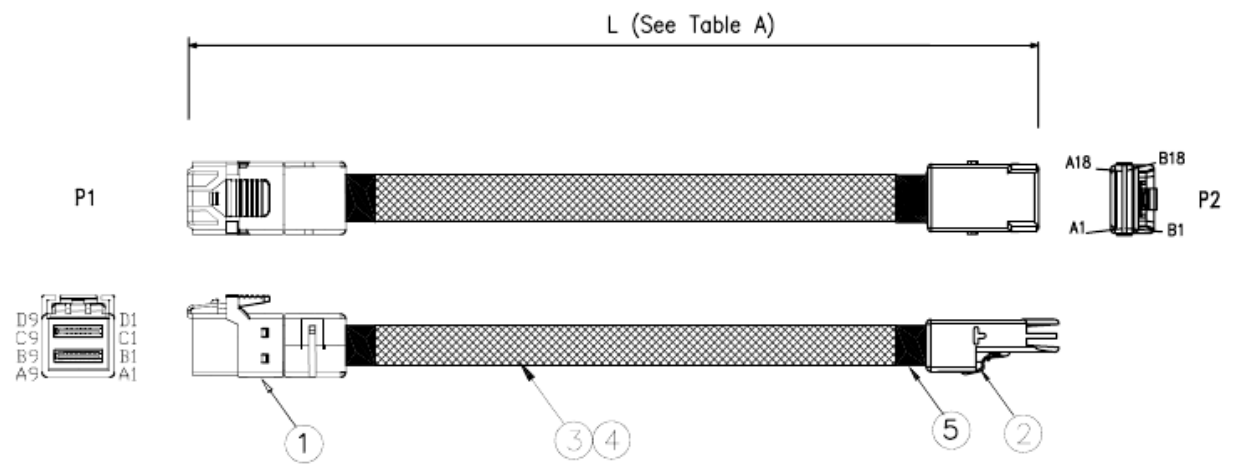
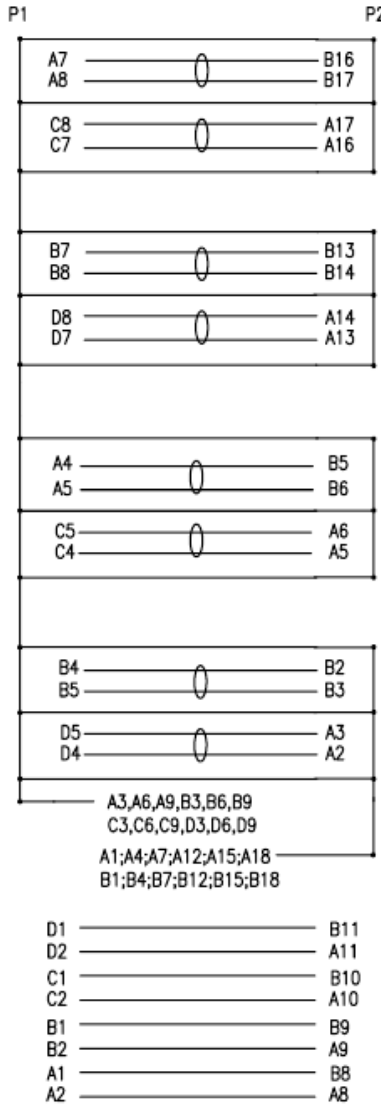


Table A. UNIT: mm

PART NO.	" L " DIM.
I3536-.5MCT	500±30mm
I3536-1MCT	1000±40mm
I3536-2MCT	2000±50mm

- ELECTRICAL CHARACTER:
- a. 100% OPEN&SHORT TESTING
 - b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
 - c. INSULATION RESISTANCE:5M Ohm(Min)
 - d. CONDUCTIVE RESISTANCE:5 Ohm(Max).

RoHS Compliant

5	H.S.T	HEAT SHRINK TUBE BLACK ID: 9.5mm	2
4	WOVEN SLEEVE	WOVEN SLEEVING TUBE BLACK	1
3	CABLE 1	(30AWG*2C+2D)*AL.MYLAR 6G CABLE	8
2	CONN	MINI SAS END SFF8087	1
1	CONN	MINI SAS HD END SFF8643	1
NO.	PART NAME	SPEC DESCRIPTION	REMAKE

TOLERANCES	DataStorageCables.com
UNIT mm SCALE NON	
PROJECTION	PRODUCT INT. SFF-8643 to SFF-8087
DWG. LIAN 10.21.13	PART NO. I3536-xMCT. SHEET 1/2
CHKD.	DWG. NO. REV A

A
B
C
D
E
F

A
B
C
D
E
F

1 2 3 4 5 6 7 8