


CUSTOMER DRAWING

1000±30

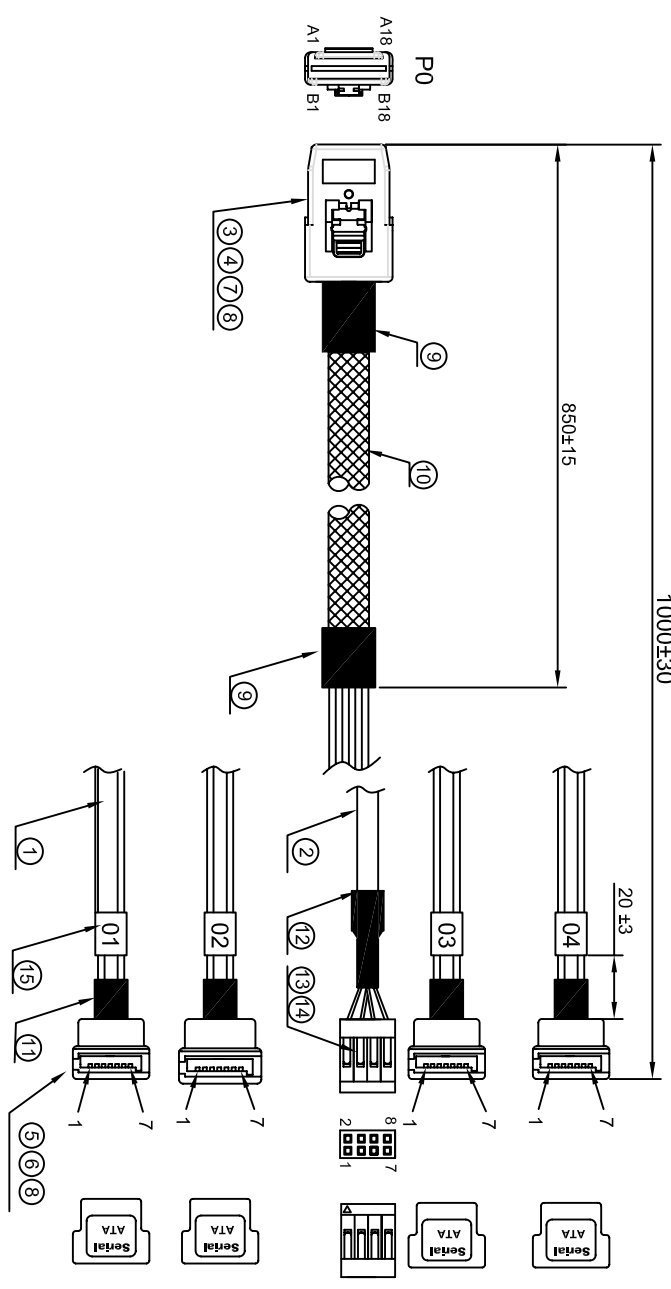

PIN ASSIGNMENT

Connector	Pin	Signal	Connector	Pin	Signal
P0	1	Ground	P4	1	Ground
	2	Rx3+		2	Tx+
	3	Rx3-		3	Tx-
	4	Ground		4	Ground
	5	Rx+		5	Rx-
	6	Rx-		6	Rx+
	7	Ground		7	Ground
	8	Tx3+		8	Tx+
	9	Tx3-		9	Tx-
	10	Ground		10	Ground
	11	Rx2+		11	Tx+
	12	Rx2-		12	Tx-
	13	Ground		13	Ground
	14	Tx2+		14	Ground
	15	Tx2-		15	Ground
P1	1	Ground	P2	1	Ground
	2	Rx1+		2	Tx+
	3	Rx1-		3	Tx-
	4	Ground		4	Ground
	5	Rx+		5	Rx-
	6	Rx-		6	Rx+
	7	Ground		7	Ground
	8	Tx1+		8	Tx+
	9	Tx1-		9	Tx-
	10	Ground		10	Ground
	11	Rx0+		11	Tx+
	12	Rx0-		12	Tx-
	13	Ground		13	Ground
	14	Tx0+		14	Ground
	15	Tx0-		15	Ground

*	4-18-0004-463020	CARTON: 46*30*20cm	200	PCS
*	4-14-0022-342851	PE BAG: 34**28**0.08mm	200	PCS
*	4-14-0001-060851	PE BAG: 6**8**0.06mm	1	PCS
*	4-20-0068-708051	AIR BAG	2	PCS
*	4-20-0020-000001	RUBBER BAND	2	PCS
*	4-16-0003-000001	TIE BK	100	mm
15	4-20-0036-100502	LABEL: "01 02 03 04" TRANSLUCENT BOTTOM BK WORD	1	PCS
14	4-19-A011-254051	PITCH 2.54mm(2563) TERMINAL GOLD PLATED OVER NIKEL	8	PCS
13	4-19-B061-240801	PITCH 2.54mm 2*4P HOUSING BK	1	PCS
12	4-15-0004-200201	TUBE OD: 3.0mm BK	25	mm
11	4-15-0004-200201	TUBE OD: 3.0mm BK	15*4	mm
10	4-20-0070-001201	NYLON BRAID W: 12.0mm	310	mm
9	4-20-0062-002001	ACETATE TAPE BLACK W=20mm	50*2	mm
8	3-02-0001-532151	PE5321	8.0	G
7	3-03-0002-005001	PP BK	3.5	G
6	3-01-0001-005001	PVC 50P BK	8.8	G
5	2-61-0001-001501	SATA 7P 90° REVERSE CONTACT GOLD PLATED=15U", HOUSING LCP BK	4	PCS
4	4-12-0015-003651	LATCH MATERIAL: SUS #301	1	PCS
3	2-70-0001-011501	MINI SAS 36P PCB	1	PCS
2	1-66-0008-200201	30#*8C OD: 3.0mm BLACK	500	mm
1	1-61-0013-200251	2C*30#*2D+AL-MYLAR+THERMOLASTIC-MYLAR	500*8	mm

MINI SAS 36P TO 4x SATA 7P/90° 1M

APPROVALS: APPROVED: Lily, HU DATE: Nov/07/07

DESCRIPTION: MINI SAS 36P TO 4x SATA

SCALE: XX : XX DRAWING NO. 13647-1M-XCRA REV. A1

NO. 1 OF 1 SHEET

REV. NO.	DESCRIPTION	DATE	APPROVED
A0	Initial Release for Manufacture	Nov/07/07	Jenny
A1	CHANGE CONN. W/LATCH TO NO LATCH	Nov/07/07	Jenny

REVISIONS