


1	REV.	REMARK	DATE	SIGN.
1	SCREWED NUT ON PLATE		10/29/07	

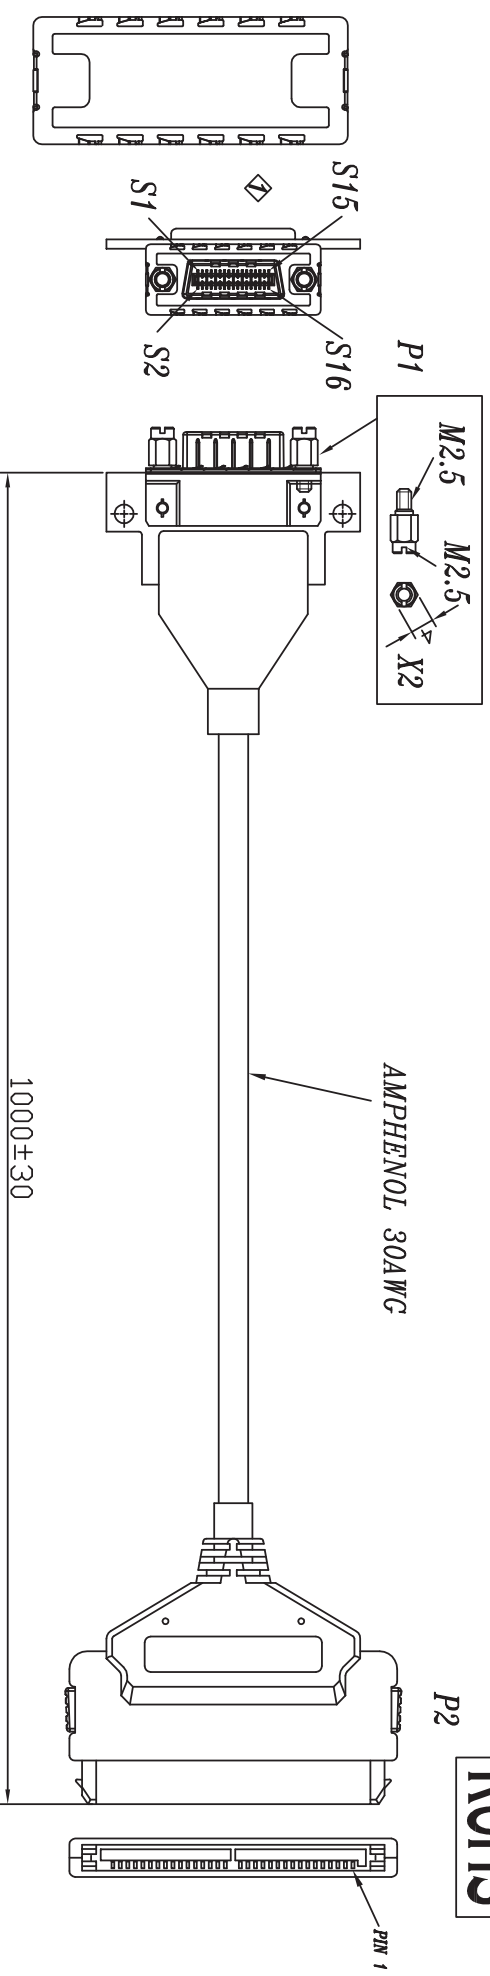

**MATERIAL ROHS COMPLIANT:**

**1. CABLE SPEC:**

**PHYSICAL:**

- 1. AMPHENOL SPECTRA-STRIP 8 PAIRS FOR SAS / SATA INTERNAL CABLE
- 2. ROHS COMPLIANT
- 3. DIAMETER: 5mm

**ELECTRICAL:**


- 1. IMPEDANCE: 100±5 OHM (DIFFERENTIAL TDR)
- 2. CAPACITANCE: 49 PF/M NOMINAL
- 3. PROP DELAY: 4.9 NS/M NOMINAL

**2. CONNECTOR:**

- P1: 4X FEMALE P.C.B MOUNTED
- P2: SAS 4I 32PIN RECEPTACLE VERTICAL TYPE

**3. WIRELIST:**

- SAS 4i HOST TO SAS 4i RECEPTACLE EXTENSION



DataStorageCables.com

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

DESC.	4X FEMALE TO SAS 4I RECEPTACLE CABLE ASSEMBLY	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm
P/N	CUSTOMER P/N					DATE	10/29/07	DWG NO:	