
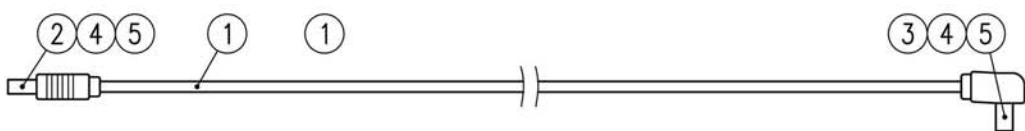


1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F  
G  
H


A  
B  
C  
D  
E  
F  
G  
H

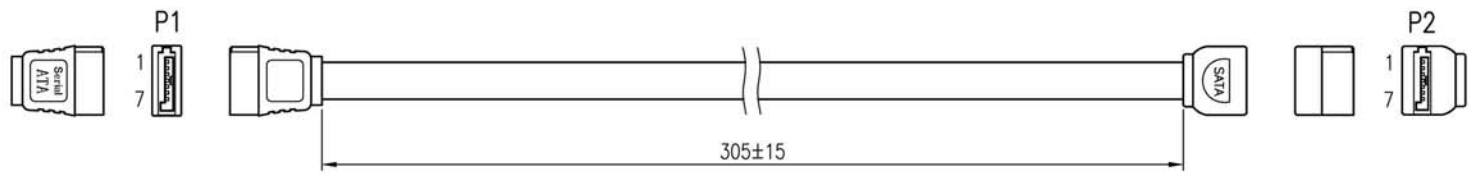

**SATA-12IN-LS**  
**MM/YY**


DETAIL ITEM "6"

NOTE: MM/YY, MM is Month, YY is Year  
EXAMPLE: 07/16-2012 is 29/12

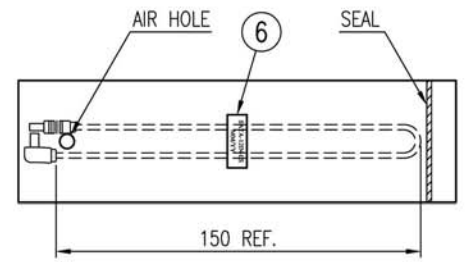

**PACKING DRAWING**

NOTE: PACKING METHOD USE PE BAG (50mm x 180mm)(ONE PIECE),  
USE SEALER TO CLOSE THE OPEN END.

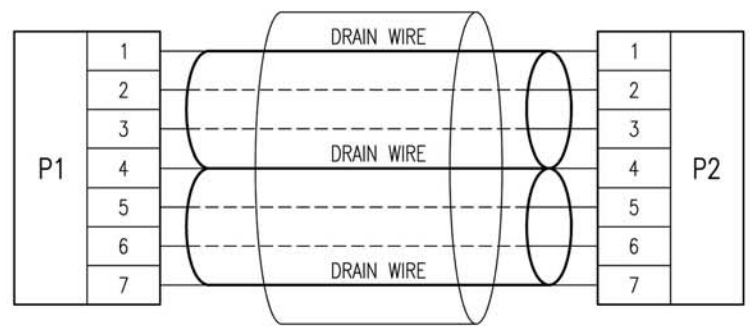

WIRING TABLE

- Electronics Test :
1. Hi-Pot Test : DC 300V/10ms
  2. Insulation Resistance : 20 MΩ (Min.)
  3. Conductive Resistance : 3 Ω (Max.)
  4. All cable open short and miss wire test : 100%

6		LABEL, 8.0mm x 35.0mm, WHITE (MARKING, BLACK)	1 PC
5		OUTER MOLD, PVC, 45P, BLACK	A/R
4		INNER MOLD, PE, WHITE	A/R
3		SATA CONNECTOR, 7-POS., RECEPTACLE, BLACK Gold Flash Plating	1 PC
2		SATA CONNECTOR, 7-POS., RECEPTACLE, BLACK Gold Flash Plating	1 PC
1		SATA CABLE, (28 AWG x 2C + AL) x 2 + 4D, UL 2725, RED	A/R
ITEM	PART NO./SUPPLIER	DESCRIPTION	Q'TY

**RoHS**  
**Compliant**

[DataStorageCables.com](http://DataStorageCables.com)

APPD. 核准		TOLERANCE 容許公差	PART NAME 品名 SATA-12IN-LSSERIAL ATA CABLE ASSEMBLY SATA 7P FEMALE STRAIGHT TYPE BLACK COLOR+UL2725 (28AWG*2C+AL)*2+4D JACKET:RED L=305mm+/-15mm+SATA 7P FEMALE RIGHT ANGLE TYPE BLACK COLOR +1 PC PER BAG & LABEL*1PC ROHS
DWG. 製圖	Hedy	SCALE 比例 參考	
DATE 制表日 2012/07/16	UNIT 單位	MM	SIZE 紙張尺寸 A 4
PAGE 張數	1 / 1	REV. 版次	A
PART NO. 料號			AF001-99FR0019R

1 2 3 4 5 6 7 8