



REVISIONS				
LTR	ECR NO.	DESCRIPTION	DATE	APPROVED
A0		Initial Release for Manufacture	Jan.31.12	

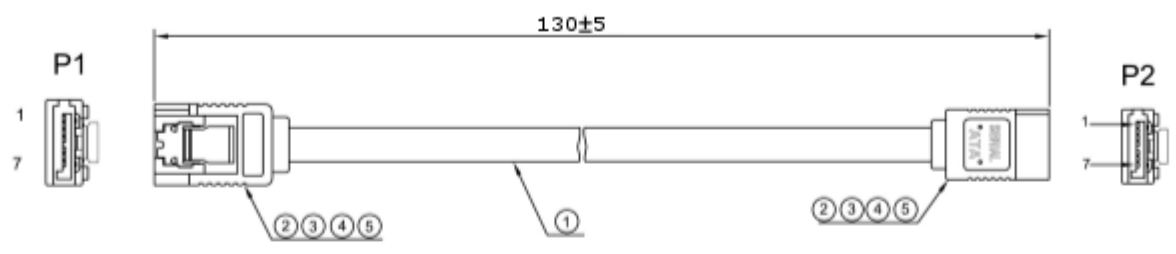

- ELECTRICAL TEST :**
1. OPEN/SHORT:100%.
  2. INSULATION RESISTANCE: 20 Mohm(MIN).
  3. CONTACT RESISTANCE: 1 ohm (MAX).
  4. HI-POT:DC 300V/10ms .



*	4-18-0004-463020	CARTON 46*30*20cm	1/500	PCS
*	4-18-0031-190475	ANGLE CHIPBOARD:190*47 mm	4/500	PCS
*	4-14-0022-342851	PE BAG 34**28**0.08mm	1/500	PCS
*	4-14-0003-081251	PE BAG 8**12**0.06mm	1/50	PCS
*	4-14-0002-030851	PE BAG 3**8**0.06mm	1	PCS
*	4-16-0003-100001	TIE BLACK	60	mm
5	3-02-0001-532151	PE	4	G
4	3-03-0002-005001	PP BLACK	5	G
3	2-61-A042-011501	LATCH: SATA 7P	2	PCS
2	2-61-A055-010101	SATA 7P BASE PIN:G/F PBT BK	2	PCS
1	1-61-0045-200201	(30#2F+AL+2D)*2C 1.85*5.8 UL20554 BLACK halogen free VW-1	595	mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT

APPROVALS		DATE	DataStorageCables.com		
DESIGNED		Jan.31.12	<b>SATA 7P FEMALE CABLE</b> SIZE: DRAWING NO. REF. <b>C SATA-130M-LSZH1 A0</b>		
DRAWN		Jan.31.12			
CHECKED		Jan.31.12			
TOLERANCE ARE: DIMENSIONS UNLESS SPECIFIED OTHERWISE			SIZE	DRAWING NO.	REF.
			C	SATA-130M-LSZH1	A0
			ED. NO.	SHEET 1 OF 1	