



# CUSTOMER DRAWING

REVISIONS		DESCRIPTION	DATE	APPROVED
LTR	A	Initial Release for Manufacture	SEP 27, 07	Jerry

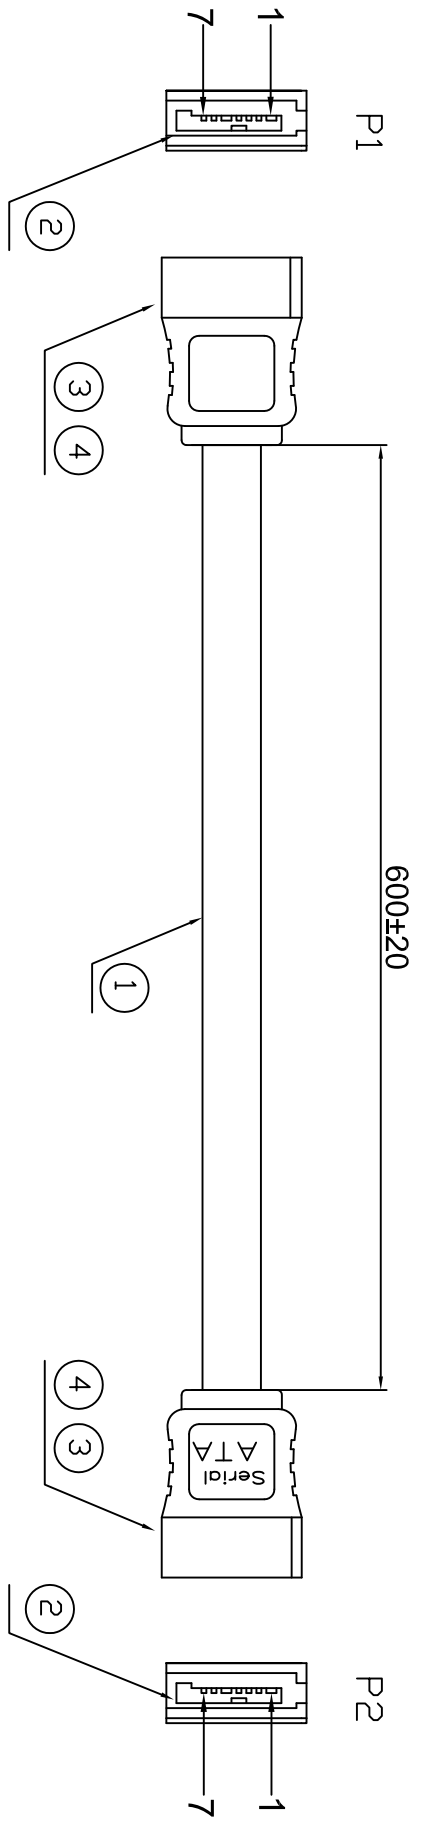

TEST:  
 1. 100% OPEN & SHORT TEST  
 2. CONDUCTANCE RESISTANCE: 5Ω(MAX)  
 3. INSULATION RESISTANCE: 5MΩ(MIN)  
 4. HI-POT TEST: 300V DC/0.01S

*	4-18-0005-463015	CARTON 46*30*15cm	1/300	PCS
*	4-14-0022-342851	PE BAG 34*28*0.08mm	1/300	PCS
*	4-14-0003-081251	PE BAG 8*12*0.06mm	1/50	PCS
*	4-14-0002-030851	PE BAG 3*8*0.06mm	1	PCS
*	4-16-0005-100010	TIE / WHITE	100	mm
4	3-02-0001-532151	PE6321	3	G
3	3-01-0001-005001	PVC BLACK 50P	4.4	G
2	2-61-A003-001501	SATA 7P/F 180° Contact Gold Plated=15U", HOUSING: PBT BK	2	PCS
1	1-61-0003-200203	(2C*26AWG+AL+2D)*2C RED OD:2.3*8.3mm UL21149	630	mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT

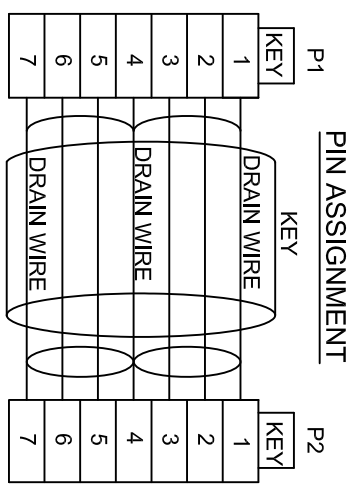

DIMENSION IN BRACKET [ ( ) ] ARE IN INCHES		DIMENSION IN BRACKET [ [ ] ] ARE IN MILLIMETERS	
TOLERANCES ARE:	XX.X	TOLERANCES ARE:	XX.X
ANGLES	43°	TOLERANCES ARE:	XX.X
DECIMALS	.020	DECIMALS	.020

APPROVALS	DATE
CHECKED	
CHECKED	

DataStorageCables.com	
SATA 7P/F TO SATA 7P/F	
CABLE ASSY 600mm	
SITE ID NO.	DRAWING NO.
C xx : xx	SATA-24IN-LP
REV. A	SHEET 1 OF 1