


PACKING DRAWING
 NOTE: PACKING METHOD USE PE BAG (ONE PIECE),
 USE SEALER TO CLOSE THE OPEN END.

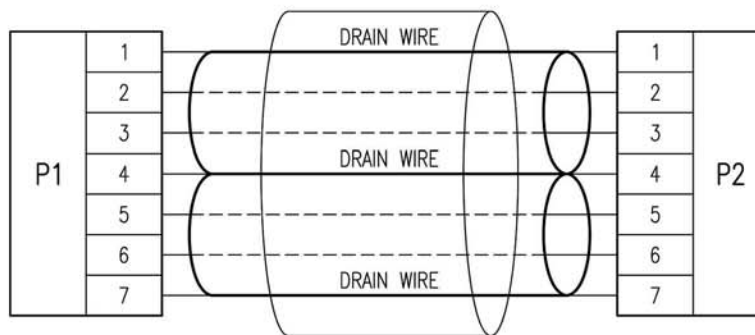

WIRING TABLE

SATA-1M-LP-1
MM/YY

DETAIL ITEM "5"
 NOTE: MM/YY, MM is Month, YY is Year
 EXAMPLE: 07/30-2012 is 07/12

Electronics Test :

1. Hi-Pot Test : DC 300V/10ms
2. Insulation Resistance : 10 MΩ (Min.)
3. Conductive Resistance : 1 Ω (Max.)
4. All cable open short and misswire test : 100%

5		WATERPROOF LABEL, 8.0mm x 35.0mm, WHITE (MARKING, BLACK)	1 PC
4		OUTER MOLD, PVC, 45P, BLACK	A/R
3		INNER MOLD, PE, WHITE	A/R
2		SATA CONNECTOR, 7-POS., RECEPTACLE, BLACK	2 PCS
1		SATA CABLE, (30 AWG x 2C + AL) x 2 + 4D, UL 2725, RED	A/R
ITEM	PART NO./SUPPLIER	DESCRIPTION	Q'TY

RoHS
Compliant

DataStorageCables.com

APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 SATA-1M-LP-1 SERIAL ATA CABLE ASSEMBLY BOTH SIDES:SATA 7P FEMALE STRAIGHT TYPE BLACK COLOR +UL2725 (30AWG*2C+AL)*2+4D JACKET:RED T/L=1000mm+/-15mm +1 PC PER BAG & LABEL*1PC ROHS
DWG. 製圖 Hedy	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 SATA-1M-LP-1
DATE 制表日 2012/07/31	PAGE 張數 1 / 1	REV. 版次 A	

1 2 3 4 5 6 7 8