
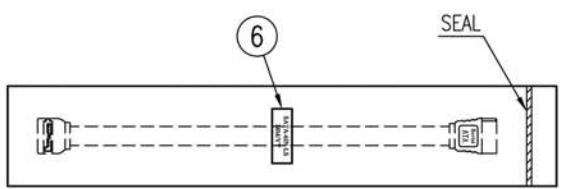



1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

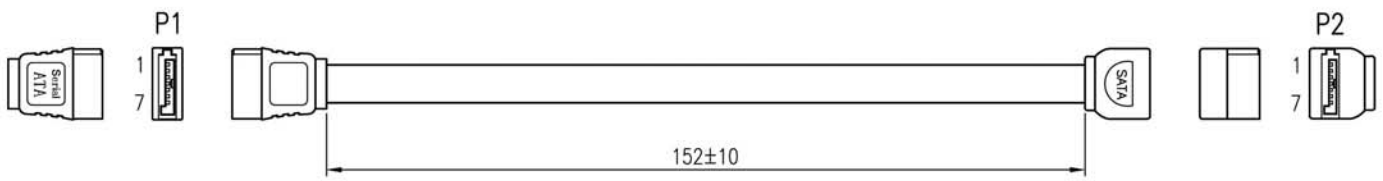

SATA-6IN-LS
MM/YY

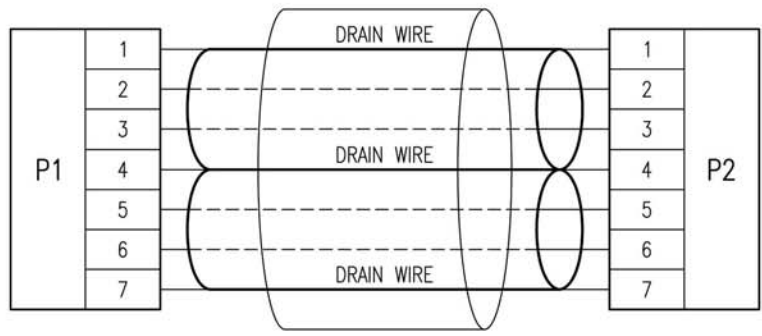

PACKING DRAWING

NOTE: PACKING METHOD USE PE BAG (40mm x 220mm)(ONE PIECE),
USE SEALER TO CLOSE THE OPEN END.

DETAIL ITEM "6"

NOTE: MM/YY, MM is Month, YY is Year
EXAMPLE: 07/16-2012 is 29/12

WIRING TABLE

- Electronics Test :
1. Hi-Pot Test : DC 300V/10ms
 2. Insulation Resistance : 20 MΩ (Min.)
 3. Conductive Resistance : 3 Ω (Max.)
 4. All cable open short and miss wire test : 100%

6		LABEL, 8.0mm x 35.0mm, WHITE (MARKING, BLACK)	1 PC
5		OUTER MOLD, PVC, 45P, BLACK	A/R
4		INNER MOLD, PE, WHITE	A/R
3		SATA CONNECTOR, 7-POS., RECEPTACLE, BLACK Gold Flash Plating	1 PC
2		SATA CONNECTOR, 7-POS., RECEPTACLE, BLACK Gold Flash Plating	1 PC
1		SATA CABLE, (28 AWG x 2C + AL) x 2 + 4D, UL 2725, RED	A/R
ITEM	PART NO./SUPPLIER	DESCRIPTION	Q'TY

RoHS
Compliant

DataStorageCables.com

APPD. 核准		TOLERANCE 容許公差	PART NAME SATA-6IN-LS SERIAL ATA CABLE ASSEMBLY SATA 7P FEMALE STRAIGHT TYPE BLACK COLOR+UL2725 (28AWG*2C+AL)*2+4D JACKET:RED L=152mm+/-10mm+SATA 7P FEMALE RIGHT ANGLE TYPE BLACK COLOR +1 PC PER BAG & LABEL*1PC ROHS
DWG. 製圖	SCALE 比例 參考	SIZE. 紙張尺寸	
DATE 制表日 2012/07/16	UNIT 單位 M M	ANG. ±	PART NO. 料號 AF001-99FR0018R
	PAGE 張數 1 / 1	REV. 版次 A	

1 2 3 4 5 6 7 8