REV	ZONE	LTR	DESCRIPTION	DATE	REVISER	APPD

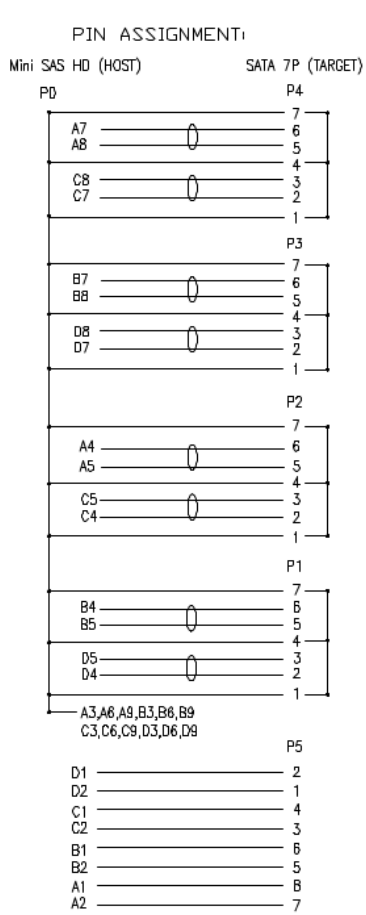

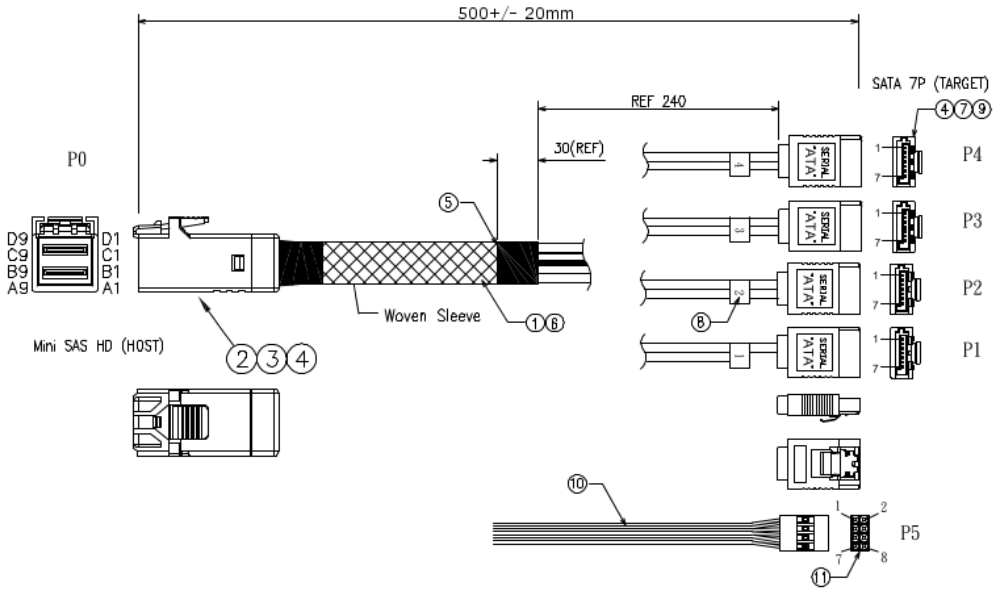

NO.	PART NAME	SPEC DESCRIPTION	REMAKE
11	HSG&TER	PITCH: 2.54 2*4P BLACK	
10	CABLE2	FLAT CABLE 30AWG*8C	
9	PVC	PVC 45% BLACK UL94V-0	
8	LABEL	LABEL PRINT P1 & P2 & P3 & P4	
7	CONN 2	SATA 7P RECEPTACLE BLACK CONTACT: G/F W/CLIP	
6	WOVEN SLEEVE	WOVEN SLEEVING TUBE BLACK	
5	H.S.T	HEAT SHRINK TUBE BLACK ID: 9.5mm	
4	PE	PE LOW DENSITY	
3	PBT	PBT BLACK	
2	CONN 1	MINI SAS 4I PLUG CONTACT: G/F W/LATCH W/PCB	
1	CABLE 1	(30AWG*2C+2D)*AL.MYLAR+MYLAR W/O JACKET	

ELECTRICAL CHARACTER:

a. 100% OPEN&SHORT TESTING
b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec
c. INSULATION RESISTANCE:5M Ohm(Min)
d. CONDUCTIVE RESISTANCE:5 Ohm(Max).

RoHS Compliant

TOLERANCES		DataStorageCables.com	
UNIT mm	SCALE NON		
PROJECTION		PRODUCT INT. SFF-8643 to 4*SATA 7P(clip) w/SB cable	
DWN. LIAN 10.28.'13		PART NO. I3547-.5MCT	SHEET 1/2
CHKD.		DWG NO.	REV B